


Clarity Matrix App Quick Start Guide

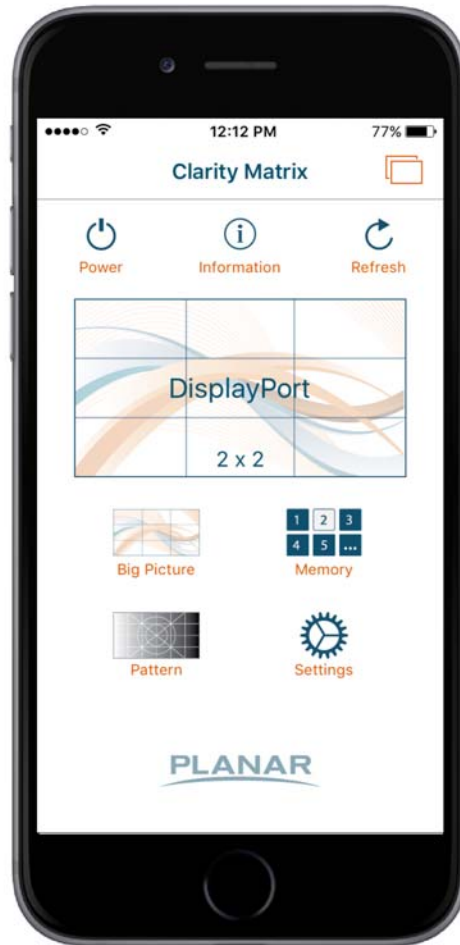

Copyright © 2015 by Planar Systems, Inc. All rights reserved.

Contents of this publication may not be reproduced in any form without permission of Planar Systems, Inc.

Trademark Credits

iPhone® and iPad® are registered trademarks of Apple Inc.

Android™ and Google Play™ are trademarks of Google Inc.

All other names are trademarks or registered trademarks of their respective companies.

Disclaimer

The information contained in this document is subject to change without notice. Planar Systems, Inc. makes no warranty of any kind with regard to this material. While every precaution has been taken in the preparation of this manual, the Company shall not be liable for errors or omissions contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Warranty and Service Plans

Planar warranty and service plans will help you maximize your investment by providing great support, display uptime, and performance optimization. From post-sale technical support to a full suite of depot services, our services are performed by trained Planar employees. When you purchase a Planar product, you get more than a display, you get the service and support you need to maximize your investment. To find the latest warranty and service information regarding your Planar product, please visit <http://www.planar.com/support>

RoHS Compliance Statement

The Clarity Matrix Video Walls are fully RoHS compliant.

ADA Compliance Statement

The Clarity Matrix Video Walls are compliant with the Americans with Disabilities Act.

Part Number: 020-1299-00A

Getting Started

This guide provides instructions for configuring and using the Clarity® Matrix™ app, which enables you to manage features of a Clarity® Matrix™ LCD Video Wall System from an iPhone®, iPad®, or Android™ mobile device.

Prerequisites

- Clarity Matrix LCD Video Wall System with G2 Architecture
 - Firmware version 04 or later
 - WallNet version 3.1.70 or later
- iPhone or iPad
 - iOS version 7 or later
- Android
 - Version 4.1 or later

Configuring the Clarity Matrix App

- 1 Download and install the Clarity Matrix app from the Apple App Store or on Google Play™.
- 2 Obtain the IP address of your Clarity Matrix Video Wall(s). This step assumes that the Clarity Matrix Video Wall is already set up on a wireless network. For setup instructions, refer to the *Clarity Matrix LCD Video Wall System with G2 Architecture Installation Guide*.
- 3 On your mobile device, make sure you are connected to the same wireless network that your Clarity Matrix Video Wall is using.
- 4 Open the Clarity Matrix app:



Matrix

- 5 Tap the Display List button:




- 6 Tap the Add Display button:



- 7 Complete the following fields and then tap **Done**:
 - **Name:** Enter a name for the Clarity Matrix Video Wall, up to 32 characters. Using a descriptive name is especially important if there are several Clarity Matrix Video Walls on the network.
 - **IP Address:** Enter the IP address of the Clarity Matrix Video Wall. For example: 10.15.0.72
- 8 Do the following as needed:
 - To add more Clarity Matrix Video Walls, repeat steps 6 and 7.
 - To delete an existing video wall, swipe left (iOS) or long press (Android) on the display name and tap the **Delete** button.
 - To edit an existing video wall, swipe left (iOS) or long press (Android) on the display name and tap the **Edit** button.
 - To select an existing video wall, tap the display name.

Using the Clarity Matrix App


Use the following buttons to control the currently selected Clarity Matrix Video Wall.

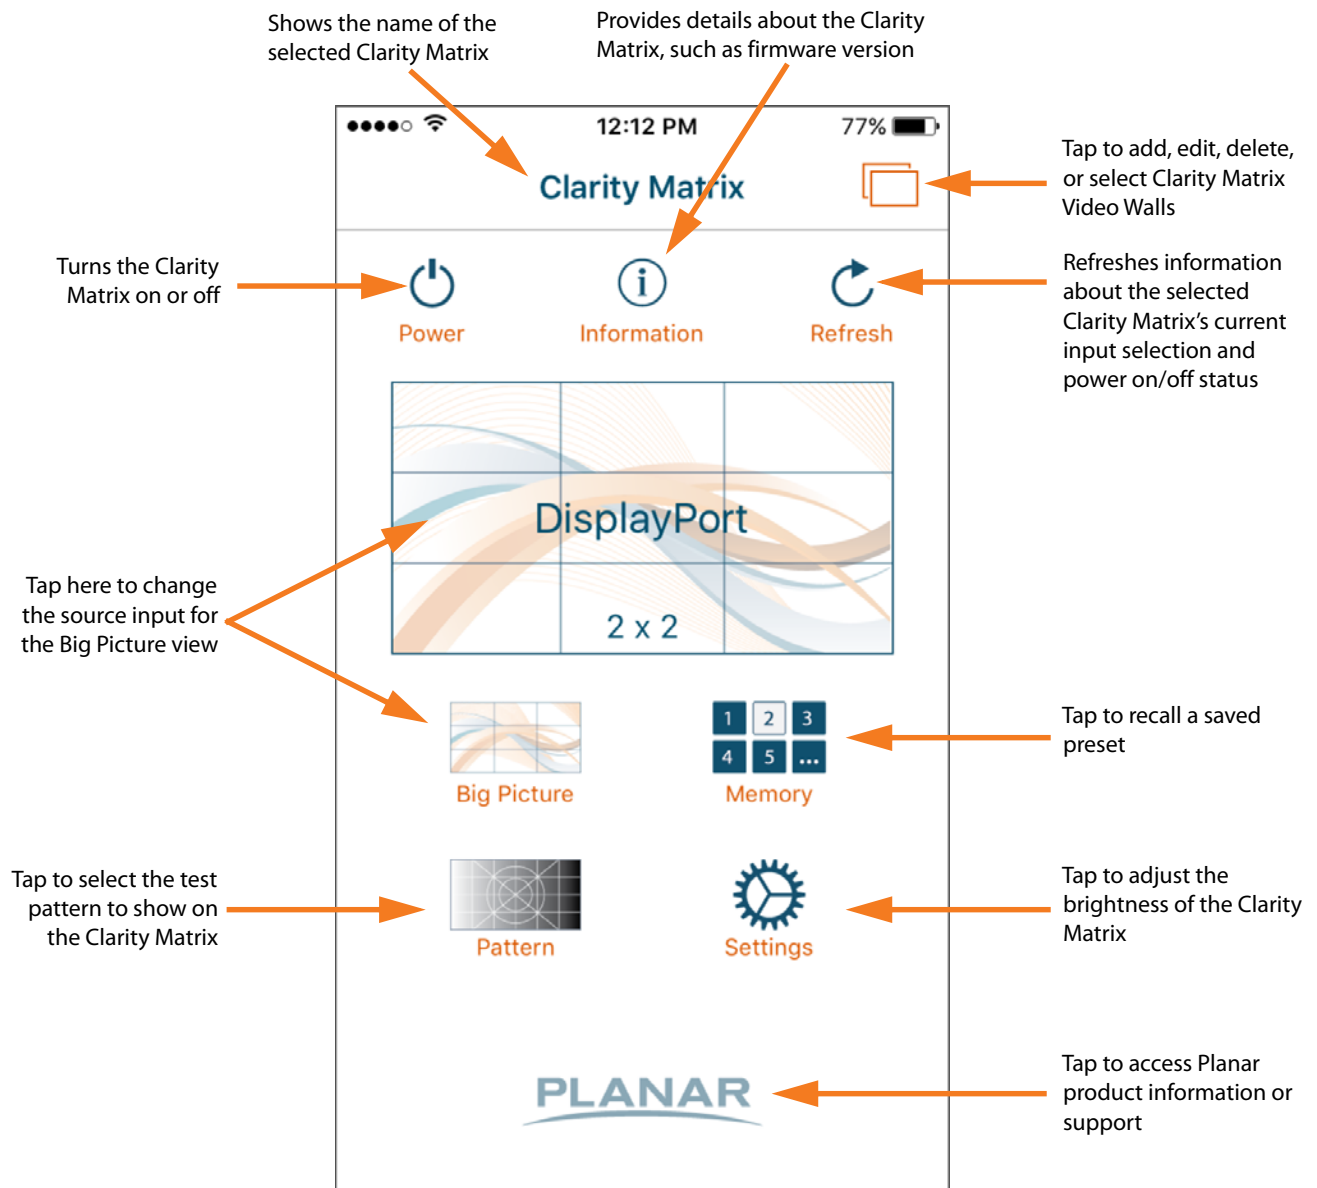


Assigning Custom Names

You can assign custom names to your Clarity Matrix Video Wall's input sources.

- 1 Swipe left (iOS) or long press (Android) on the display name to access the **Edit** and **Delete** buttons as shown below. Tap the **Edit** button.

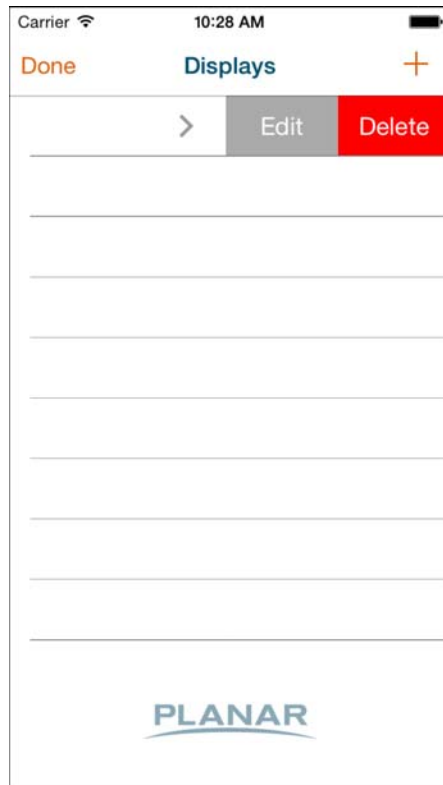

iOS

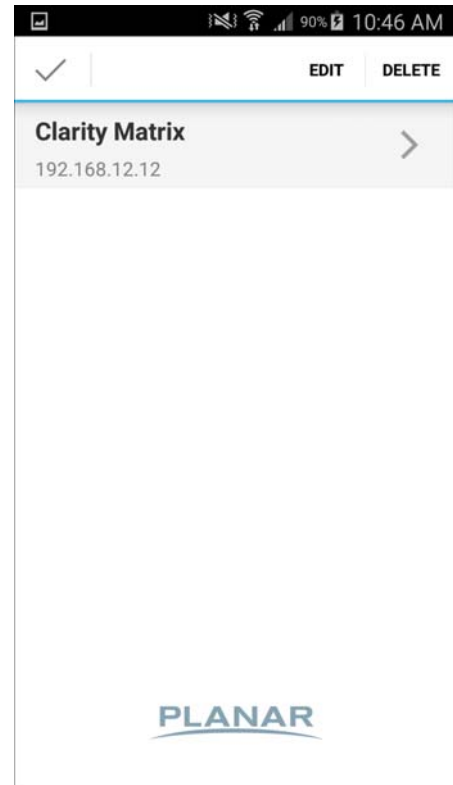

Android

- 2 Enter the name in the **Custom Name** field for each input as desired. For example:

The screenshot shows the 'Edit Display' screen in the Clarity Matrix App. At the top, there are three buttons: 'Cancel' (orange), 'Edit Display' (blue), and 'Done' (orange). Below the buttons, there are two text input fields: 'Name: Clarity Matrix' and 'IP Address: 192.168.12.12'. Below these fields, there are four rows of input settings, each with a toggle switch and a 'Custom Name' field. The first row is 'DisplayPort' with a green toggle switch and 'Custom Name: PC'. The second row is 'HDMI A1' with a green toggle switch and 'Custom Name: ContentSmart'. The third row is 'HDMI A2' with a green toggle switch and 'Custom Name: TV'. The fourth row is 'HDMI A3' with a white toggle switch and 'Custom Name: HDMI A3'. The fifth row is 'HDMI A4' with a white toggle switch and no 'Custom Name' field.

- 3 Tap the toggle button to indicate inputs that are not used (i.e. HDMI A3 and HDMI A4 in the example above).
- 4 Tap **Done** to save your changes.