



Using the PD370/420/PD470 with SCART RGB Sources

This document describes how to connect RGB sources with a SCART connector to a Planar PD370/420/PD470 Full-HD Flat-Panel Display.


1. Using a SCART-to-RGB cable, connect the green/blue/red video output from the source to the Y/Pb/Pr terminals on the **VIDEO 1** input.
2. Connect the composite (horizontal/vertical) sync output from the source to the **AV1** input.

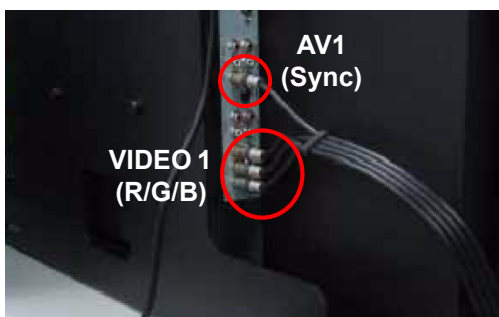

3. Select **Setup** from the Main Menu.
4. Select **Main Source Select** from the Setup Menu.
5. Select **Main Source Activate** from the Main Source Select Menu.

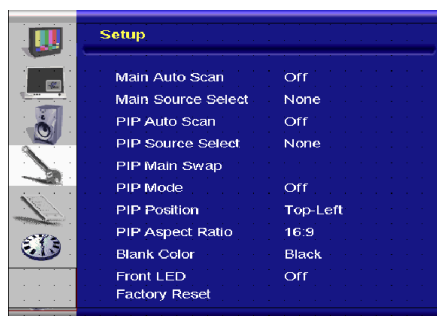

6. Press **▲** or **▼** to highlight **SCART**. Then, press **►**.
7. Press **◀** or **▶** to select **ENABLE**. This enables the auto-scan feature to work with the SCART input.
8. Press **EXIT** to store this setting.

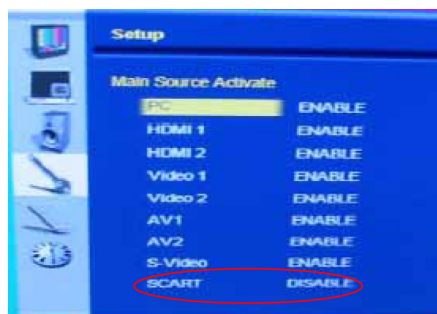

To select the SCART input with Auto-scan, press the **AUTO** remote control button repeatedly until you see an image from the SCART source.

Notes: