


## Planar CarbonLight CLF Series LED Flooring System

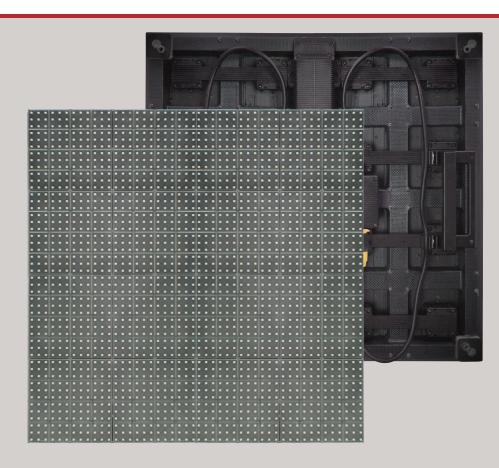

## Signature Design with Carbon Fiber Structure

The Planar<sup>®</sup> CarbonLight<sup>™</sup> CLF Series is an LED flooring system available in 5.2 and 10.4mm pixel pitches. The Planar CarbonLight CLF Series flooring system is constructed with a lightweight, carbon fiber frame, creating a high-strength structure built to withstand loads up to 500kg per display.

The Planar CarbonLight CLF Series features a lightweight, highstrength carbon fiber cabinet in a modular design to fit a wide range of simple or complex applications. Designed for indoor or outdoor applications, the Planar CarbonLight CLF Series is also layered with a high-strength, wear-proof mask to extend the usability and overall appearance, no matter the environment.

## **KEY FEATURES**

- Available in 5.2 and 10.4mm pixel pitches
- IP65 Protection rating for outdoor applications (for 10.4mm pixel pitch)
- Loads up to 500kg per display
- High-strength, wear-proof mask
- Display size: 500 x 500 x 82mm

PLANAR CARBONLIGHT CLF SERIES		
Model Name	CLF5.2	CLF10.4
Pixel Pitch (mm)	5.2	10.4
Resolution	96x96	48x48
Cabinet Size (WxHxD)	500x500x82mm   19.69x19.69x3.23in	
Cabinet Weight	8.0kg   17.6lb	
Weight Bearing Capacity (per cabinet)	500kg   1102lb	
Power Supply	Dual	
Power Consumption, Maximum (watts)	300/Cabinet   1200/sq m   111/sq ft	
Power Consumption, Typical (watts)	150/Cabinet   600/sq m   56/sq ft	
Line Voltage	100-240V AC, 50/60 Hz	
Brightness Max (cd/sq. m)	1500	5000
Contrast Ratio	2000:1	
LED Refresh Rate	1000Hz	
Color Temperature, Calibrated	6500k	
Viewing Angle, Horizontal	140°	
Viewing Angle, Vertical	140°	
Frame Rate	30~70Hz	
Grey Scale	14 bit	
Service Access	Rear	
Installation	Floor	
Lifetime, Typical	75000 hrs	
Environment	Indoor	
Protection Rating	IP40	IP65
Operating Temperature (degrees F/C)	-20° to 40° C	-4° to 104° F
Storage Temperature (degrees F/C)	-20° to 50° C   -4° to 122° F	
Cabinet Material	Carbon Fiber	