

CLEARTOUCH™32-INCH PT3285PW

The new ClearTouch™32-inch model PT3285PW full HD display delivers benefits that combine a stylish, easy to clean seamless front face with a swift multi-touch experience. Similar to a smartphone, it provides the most responsive gestures-based display on the market today. The big, bright screen, and attention grabbing all glass front surface makes the PT3285PW perfect for use by retailers and enterprise IT in applications requiring gestures-based support. The PT3285PW features a projected capacitive touch screen with USB interface, analog and digital DVI-D video inputs, an internal power supply, speakers, and a metal enclosure that's compatible with mounting options using the 400 x 200 VESA standard hole pattern on the back of the monitor. This monitor is HID compliant and compatible with Microsoft Window® 7 operating system.



32" Multi-Touch Monitor

FEATURES

Bright, attention grabbing 32-inch display

Sleek, zero bezel

Extremely fast response time

Multi-touch – supports gesturing

Industry leading 3-year, 2-day advance replacement warranty

Targeted at retailers and enterprise IT

Projected Capacitive touch technology with USB interface

Analog and Digital (DVI-D) video input

Recognizes touch input from finger, thin gloved hand or soft stylus

Compatible with Microsoft Windows® 7 only

Compatible with mounting options that use the 400 x 200 mm VESA standard

ClearTouch[™]32-inch model PT3285PW


Product Name	PT3285PW
Market/Application	Retail/POS: Interactive signage
	Enterprise IT: Signage, Desktop
Planar Part Number	997-6700-00
Viewable Size	31.6" diagonal (27.5" horizontal x 15.47" vertical)
Touchscreen Type	Projected Capacitive
Touchscreen Interface	USB
Transmissivity	N/A
Contrast Ratio (Typical)	5000:1
Viewing Angle (Typical)	178° Horizontal and Vertical
Response Time (Typical)	6.5 ms
Brightness (w/touchscreen)	360 cd/m ²
Brightness (w/o touchscreen)	400 cd/m ²
Display Type	LCD Active Matrix Flat Panel Display (TFT)
Display Resolution	1920 x 1080
Aspect Ratio	16:9
Refresh Rate	50 to 60 Hz
Dimensions (w/o stand)	30.9" x 18.9" x 3.3" (786.1 mm x 480.7 mm x 84.0 mm) (W x H x D)
Display Weight (w/o stand)	35.3 lbs (16.0 kg) net; 40.1 lbs (18.2 kg) shipping
Panel Depth	3.3" (84.0 mm)
Video Inputs	Analog and Digital (DVI-D)
Audio Output	10W (RCA Connector)
Compatibility	Windows® 7 only
Power Supply	Internal AC adapter
Power Requirements	100-240 VAC (50/60 Hz)
Power Consumption	100W
VESA Compatible/Location	Built-in 400 x 200 mm VESA, back
Service and Support	3-Year Customer First™ Warranty featuring FREE 2-Day Advance Replacement (US only)
Product Approvals	UL/c-UL, FCC-Class A, TUV-T mark, CE, RoHS
Optional Accessories	Deskstand, Fixed Wall Mount, Adjustable Tilting Wall Mount

^{**}Weight and dimensions are approximate. Specifications and design are subject to change without notice. This product may be subject to export control regulations.


For more information

To learn more about the Planar PT3285PW by Planar Systems, call 866-752-6270 or visit www.planartouch.com


ClearTouch™32-Inch PT3285PW



Side View

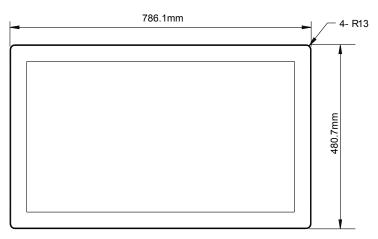

Front View

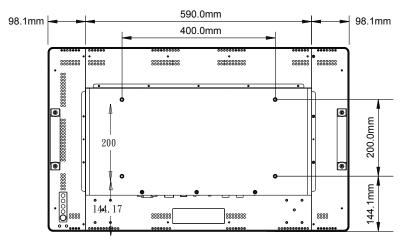

Black View



Planar Systems, Inc. 1195 NW Compton Drive Beaverton, OR, 97006-1992, USA Toll Free +1-866-752-6270 www.planartouch.com

Planar is a trademark of Planar Systems, Inc. All other trade and service marks are the property of their holders.

Copyright \odot 2012 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without written permission from Planar Systems, Inc. Information in this document is subject to change without notice.