


# Leyard uLV10

## Outdoor LED Video Wall

The Leyard® uLV Series is a line of outdoor LED video walls available in 10, 16 and 20 millimeter pitches for high-brightness environments. If your outdoor LED video wall is to be viewed from a further distance, the Leyard uLV Series provides exceptional value while delivering a vivid, bright and consistent image. Highly scalable and front serviceable, the Leyard uLV Series' efficient design reduces construction and operation costs. Its highly reliable, weather-resistant design delivers 24x7 run-time in a wide range of environments.

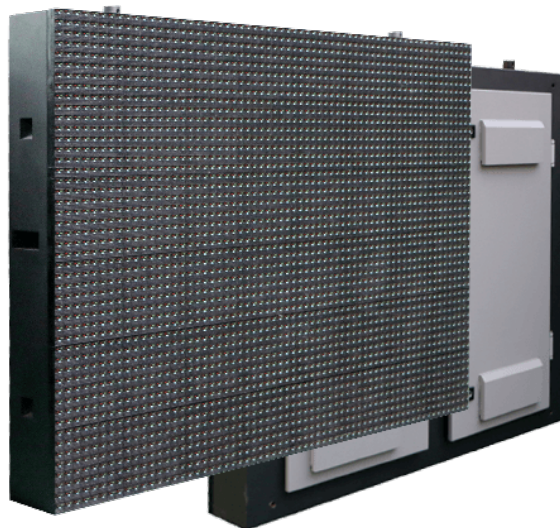

SPECIFICATION	DETAIL
Product Name	uLV10A-G
Planar Part Number	uLV10A-G
Pixel Pitch	10.0mm
Resolution (per LED Cabinet)	128x96
Pixel Density (Pixels per LED Cabinet)	12,288
Pixel Density	929 per sq. foot (10,000 per sq. meter)
Gap Between LED Cabinets	Seamless
Bezel Width	None
LED Type	LED Lamp
Pixel Configuration	1R1G1B
LED Configuration	1 Red, 1 Green, 1 Blue
Brightness, Uncalibrated, Calibrated	5,500 - 6,500
Brightness, Uniformity	97%
Viewing Angle, Horizontal	135°
Viewing Angle, Vertical	60°
Color Uniformity	within $\pm 0.003CxCy$

<b>Color Temperature, Adjustable (k)</b>	3,200-9,300, adjustable
<b>Contrast Ratio</b>	6,000:1
<b>Frame Rate</b>	50, 60 Hz
<b>LED Refresh Rate</b>	1,920 Hz
<b>Power Consumption, Maximum (watts)</b>	651/cabinet, 650 per sq. meter
<b>Power Consumption, Typical (watts)</b>	217/cabinet, 267 per sq. meter
<b>Runtime Duty Cycle</b>	24x7
<b>Lifetime: Typical</b>	50,000 hours to half brightness
<b>Acoustic Noise</b>	Fanless Operation
<b>Operating Temperature/Humidity (degrees F/C, relative humidity)</b>	-4° to +104°F (-20° to +40°C) at 10-90% RH
<b>Storage Temperature/Humidity (degrees F/C, relative humidity)</b>	-22° to +140°F (-30° to +60°C) at 10-80% RH
<b>LED Cabinet Size (W x H x D)</b>	50.39" x 37.80" x 5.91" (1,280 mm x 960 mm x 150 mm) (cabinet only, not including mount)
<b>LED Cabinet Diagonal</b>	62.99" (1,600 mm)
<b>LED Cabinet area</b>	13.23 sq. feet (1.2288 sq. meters)
<b>LED Cabinet Weight</b>	112.4 lbs (51 kg)
<b>Warranty</b>	2 year limited warranty
<b>Professional Services</b>	Install, Service
<b>Adjustable Mount</b>	Optional
<b>Environment</b>	Outdoor
<b>Application</b>	Fixed
<b>Installation, Service</b>	Rear / Front tiles
<b>Standard Mounting Configurations</b>	Fixed, Self Standing
<b>Americans with Disability Act (ADA) Compliance</b>	No
<b>Power Supply Type</b>	Integrated
<b>Line Voltage</b>	100-240 Volts AC, 50 & 60Hz
<b>Video Input Type</b>	HDMI, DVI
<b>Video Input Resolution Maximum</b>	2560x1600 @ 60 Hz
<b>Regulatory Compliance</b>	UL, CE, FCC
<b>Display Control</b>	Leyard® Control Software included

<b>Control Input Type</b>	USB
<b>IP Rating</b>	IP65 (front), IP43 (rear)

For more information, please visit [www.planar.com](http://www.planar.com)

*Specifications are subject to change without notice.*

*Specification Report Date: 5/20/2018*

*© Copyright 2018 Planar Systems, Inc. All rights reserved*