

Planar Flat Panel Monitors - 15"-19"



SPECIFICATIONS	PL1500M-15"	PL1700 / PL1700M / PL1702 - 17"	PL1711M - 17"	PL1900 - 19"	PL1910M - 19"	PL1920M - 19"
Planar Part Number	● PL1500M-BK 997-5905-00	● PL1700-BK 997-2795-00 ● PL1700M-BK 997-2796-00 ● PL1700M-WH 997-2850-00 ● PL1702-BK 997-5562-00	● PL1711M-BK 997-3111-00 ● PL1711M-WH 997-5509-00	● PL1900-BK 997-3095-00 ● PL1900-WH 997-6374-00	● PL1910M 997-2797-00 ● PL1910M-WH 997-5510-00	● PL1920M 997-5956-00
Contrast Ratio (typical)	700:1	1000:1	1000:1	1000:1	1000:1	1000:1
Response Time (typical)	8 ms	5 ms	5 ms	5 ms	5 ms	5 ms
Viewing Angle	160° H, V	170° H, 160° V	170° H, 160° V	150° H, 140° V	170° H, 160° V	170° H, 160° V
Brightness (typical)	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²
Pixel Pitch	0.297 mm	.264 mm	.264 mm	.294 mm	.294 mm	.294 mm
Refresh Rate	75 Hz	56-75 Hz (75 Hz recommended)	56-75 Hz (60 Hz recommended)	47-63 Hz (60 Hz recommended)	50-75 Hz (60 Hz recommended)	75 Hz max
Power Consumption	25W (2W standby) 100/240 VAC (50/60 Hz)	25W (2W standby) 100/240 VAC (50/60 Hz)	25W (2W standby) 100/240 VAC +/- 10% (50/60 Hz)	25W (1W standby) 100/240 VAC (47/63 Hz)	28W (2W standby) 100/240 VAC +/- 10% (50/60 Hz)	45W 100/240 VAC
Input Options	Analog	Analog	Analog, Digital (DVI-D)	Analog	Analog, Digital (DVI-D)	Analog, Composite BNC (in/out), S-Video (in/out), Audio (in/out)
External Connections	D-sub 15-pin	D-sub 15-pin 1/8" audio jack (PL1700M Only)	D-sub 15-pin 24-pin DVI-D, 1/8" audio jack	D-sub 15-pin	D-sub 15-pin 24-pin DVI-D, 1/8" audio jack	VGA input 15 pin, composite video input (BNC) x 1, composite video output (BNC) x 1, S-Video input x 1, S-Video output x 1
Audio - Built-in Speakers	Yes	Yes, TrueMedia™, 1W/ch (PL1700M Only)	Yes, TrueMedia™, 1W/ch	No	Yes, 1W/ch	Yes, 1W/ch
Features	🔒 Kensington® Security Slot, Anti-glare coating, Multi-language display, On screen display (OSD), 4:3 aspect ratio	Multi-Mount Ready™, 🔒 Kensington® Security Slot, Built-in power supply, 1/8 audio jack (PL1700M Only), Fast response time for excellent video performance, 4:3 aspect ratio, TrueMedia™ Sound (PL1700M Only)	Resistance-Free QuadStand™ with pivot, swivel and tilt - over 5" of height adjustment, Multi-Mount Ready™, 🔒 Kensington® Security Slot, 90° Swivel, 4:3 aspect ratio, TrueMedia™ Sound	Fast response time for excellent video performance, 🔒 Kensington® Security Slot, 4:3 aspect ratio	🔒 Kensington® Security Slot, VESA DPMS compliant, DVI-D Digital Input, 4:3 aspect ratio	🔒 Kensington® Security Slot, Anti-glare coating, Multi-language display, On screen display (OSD), 4:3 aspect ratio
USB Hub	No	No	No	No	No	No
Pivot	No	No	Yes	No	No	No
Tilt Range	-5° to +20°	-5° to +20°/ 360° (PL1702 Only)	-5° to ~+25°	-5° to +20°	-5° to +20°	-5° to +20°
Power Supply	Internal	Internal	Internal	External	Internal	Internal
Display Active Area (WxH)	15" diagonal (11.97" x 8.98")	17" diagonal (13.30" x 10.64")	17" diagonal (13.30" x 10.64")	19" diagonal (14.82" x 11.85")	19" diagonal (14.82" x 11.85")	19" diagonal (11.97" x 8.98")
Native Resolution	1024 x 768 XGA	1280 x 1024 SXGA	1280 x 1024 SXGA	1280 x 1024 SXGA	1280 x 1024 SXGA	1024 x 768 XGA
Dimensions (w/stand) (WxHxD)	13.18" x 13.47" x 7.86"	14.4" x 15.1" x 7.8"	14.4" x 16.1" x 8.6" (ht adjust to 23.2")	15.98" x 15.91" x 8.15"	16.2" x 16.46" x 8.7"	16.02" x 16.98" x 7.89"
Dimensions (w/o stand)(WxHxD)	13.18" x 11.68" x 2.39"	14.4" x 13" x 2.46" (PL1700) 14.4" x 13.5" x 2.46" (PL1700M)	14.4" x 13.5" x 2.46"	15.98" x 13.11" x 1.93"	16.2" x 14.8" x 2.52"	16.02" x 14.15" x 2.77"
Weight	5.95 lbs (net), 8.8 lbs (shipping)	8.6 lbs. (net), 13 lbs. (shipping)	14.8 lbs. (net), 19.2 lbs. (shipping)	9.04 lbs. (net), 13 lbs. (shipping)	9.9 lbs. (net), 15.2 lbs. (shipping)	10.08 lbs. (net), 12.35 lbs. (shipping)
Weight (w/o stand)	-	7.5 lbs.	7.5 lbs.	8.3 lbs.	8.3 lbs.	-
Approvals	FCC-B, CE, UL/cUL	UL/cUL, FCC-B, CE, RoHS	UL/cUL, FCC-B, CE, RoHS	UL/cUL, FCC-B, CE, VESA DDC2B™ RoHS	UL/cUL, FCC-B, CE, RoHS	FCC-B, CE, cTUVus
*Black models TCO '95 certified						
Customer First™ Warranty	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement
VESA Compatible/Location	Built-in 75 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back
Planar® Versatility™ Mount	Fixed Wall Mount, Extended Arm Mount, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall Mount, Extended Arm Mount, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall Mount, Extended Arm Mount, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall Mount, Extended Arm Mount, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall Mount, Extended Arm Mount, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall Mount, Extended Arm Mount, Dual/Quad Monitor Stands. No adapter required.


Planar Flat Panel Monitors - 19" and 19" Widescreen



SPECIFICATIONS	PL1911M - 19"	PLL1900MW - 19" WIDE	PL1910W - 19" WIDE	PL1910MW - 19" WIDE	PL1911MW - 19" WIDE	PL2010MW - 20" WIDE
Planar Part Number	● PL1911M 997-3113-00	● PLL1900MW 997-6362-00	● PL1910W 997-6077-00	● PL1910MW 997-5260-00	● PL1911MW 997-5590-00	● PL2010MW 997-6011-00
Contrast Ratio (typical)	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1
Response Time (typical)	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms
Viewing Angle	150° H, 140° V	170° H, 160° V*	170° H, 160° V	170° H, 160° V	170° H, 160° V	170° H, 160° V*
Brightness (typical)	250 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²	300 cd/m ²	300 cd/m ²
Pixel Pitch	.294 mm	.3 mm	.3 mm	.243 mm	.243 mm	.276 mm
Refresh Rate	56-75 Hz (60 Hz recommended)	55~76 Hz (60 Hz recommended)	75 Hz	75 Hz	75 Hz	75 Hz
Power Consumption	28W (2W standby) 110/220 VAC +/- 10% (50/60 Hz)	20W (0.5W standby)	23W (1W standby)	42W (max) (< 2 standby)	42W (max) (< 2 standby)	52W (1W standby)
Input Options	Analog, Digital (DVI-D)	Analog (VGA)	Analog (VGA), Digital (DVI-D)	Analog (VGA), Digital (DVI-D w/HDCP)	Analog (VGA), Digital (DVI-D w/HDCP)	Analog (VGA), Digital (DVI-D w/HDCP)
External Connections	D-sub 15-pin, 24-pin DVI-D, 1/8" audio jack	D-sub 15-pin, 24-pin DVI-D, 1/8" audio jack, headset jack	D-sub 15-pin, 24-pin DVI-D	D-sub 15-pin, 24-pin DVI-D (w/HDCP), 1/8" audio jack	D-sub 15-pin, 24-pin DVI-D (w/HDCP), 1/8" audio jack	D-sub 15-pin, 24-pin DVI-D (w/HDCP), 1/8" audio jack
Audio - Built-in Speakers	Yes, TrueMedia™, 1W/ch	Yes, TrueMedia™, 1W/ch	No	Yes, TrueMedia™, 1W/ch	Yes, TrueMedia™, 1W/ch	Yes, TrueMedia™, 1W/ch
Features	Resistance-Free QuadStand™ with pivot, swivel and tilt, Multi-Mount Ready™, Kensington® Security Slot, 4:3 aspect ratio, TrueMedia™ Sound	Anti-glare coating; Multi-language display; On screen display (OSD) Kensington® Security Slot	Anti-glare coating; Multi-language display; On screen display (OSD) Kensington® Security Slot	Dual Analog and DVI-D video inputs 1680 x 1050 optimum resolution, 100 mm VESA mount, Extra wide viewing angle, High contrast ratio of 1000:1, Exceptionally fast 5 ms response time	Dual Analog and DVI-D video inputs, 1680 x 1050 optimum resolution, 100 mm VESA mount, Extra wide viewing angle, High contrast ratio of 1000:1, Exceptionally fast 5 ms response time, QuadStand™ w/tilt and height adjustment	Dual Analog and DVI-D video inputs, Excellent 1600 x 900 Fast 5 ms response time 100 mm VESA mount
USB Hub	No	No	No	No	No	No
Pivot	Yes	No	No	No	No	No
Tilt Range	-5° to ~+25°	-5° to +20°	-5° to +20°	-5° to +20°	-5° to +20°	-5° to +20°
Power Supply	Internal	Internal	Internal	Internal	Internal	Internal
Display Active Area (WxH)	19" diagonal (14.82" x 11.85")	18.5" diagonal (16.14" x 9.07")	18.5" diagonal (16.14" x 9.07")	19" diagonal (16.07" x 10.05")	19" diagonal (16.07" x 10.05")	20" diagonal
Native Resolution	1280 x 1024 SXGA	1366 x 768 WXGA	1366 x 768	1440 x 900 WSXGA+	1440 x 900 WXGA+	1600 x 900
Dimensions (w/stand) (WxHxD)	16.2" x 17.2" x 8.6" (height adjust to 22.3")	17.73" x 14" x 7.01"	7.6" x 12.95" x 6.38"	17.26" x 13.62" x 7.8"	17.26" x 14.33" x 9.02" (height adjust to 19.45")	18.78" x 13.48" x 7.80"
Dimensions (w/o stand) (WxHxD)	16.2" x 14.8" x 2.52"	17.73" x 11.40" x 1.91"	7.6" x 12.95" x 2.56"	17.26" x 13.46" x 2.38"	17.26" x 13.46" x 2.38"	18.78" x 11.60" x 2.40"
Weight	17 lbs. (net), 22.3 lbs. (shipping)	5.73 lbs. (net), 7.72 lbs. (shipping)	7.05 lbs. (net), 9.92 lbs. (shipping)	9.2 lbs. (net), 11.9 lbs. (shipping)	9.2 lbs. (net), 11.9 lbs. (shipping)	9.5 lbs. (net), 12.5 lbs. (shipping)
Weight (w/o stand)	8.3 lbs.	-	-	8.9 lbs.	8.9 lbs.	8.8 lbs.
Approvals *Black models TCO '95 certified	UL/cUL, CE, FCC-B, RoHS	cTUVus, CE, FCC-B, RoHS	UL, CB, FCC-B, CE	UL/cUL, CE, FCC-B, RoHS	UL/cUL, CE, FCC-B, RoHS	FCC-B, cUL, UL, CE
Customer First™ Warranty	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement
VESA Compatible/Location	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back
Planar® Versatility™ Mount	Fixed Wall Mount, Extended Arm Mount, Dual/Quad Monitor Stands. No adapter required.	-	-	Fixed Wall/Extended Arm Mounts, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall/Extended Arm Mounts, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall/Extended Arm Mounts, Dual/Quad Monitor Stands. No adapter required.

*Specified at CR≥5:1. All other LCDs specified at CR≥10:1.

Planar Flat Panel Monitors - 20"-22" Widescreen

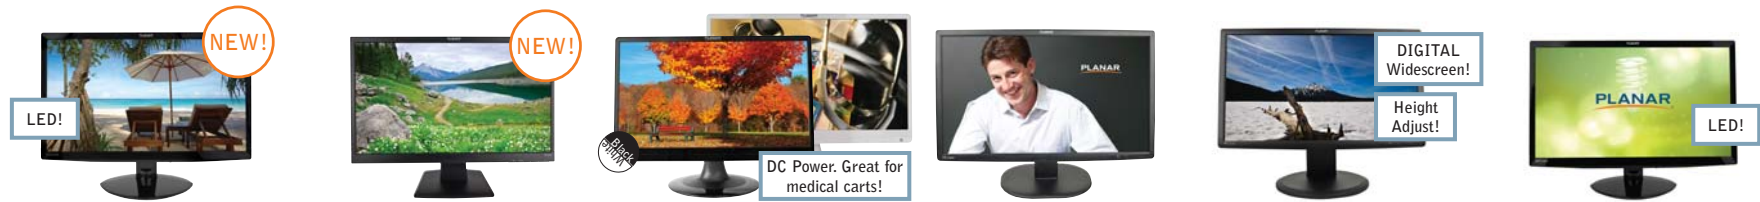

SPECIFICATIONS	PLL2010MW - 20" WIDE	PL2210W - 22" WIDE	PLL2210MW - 22" WIDE	PX2210MW - 22" WIDE	PX2211MW - 22" WIDE	PXL2260MW - 22" WIDE
Planar Part Number	● PLL2010MW 997-6473-00	● PL2210W 997-6498-00	● PLL2210MW-BK 997-6501-00 ● PLL2210MW-WH 997-6404-00	● PX2210MW 997-5855-00	● PX2211MW 997-6125-00	● PXL2260MW 997-6217-00
Contrast Ratio (typical)	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1
Response Time (typical)	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms
Viewing Angle	170° H, 160° V*	160° H, V*	170° H, 160° V*	170° H, 160° V*	170° H, 160° V	170° H, 160° V
Brightness (typical)	250 cd/m ²	300 cd/m ²	250 cd/m ²	300 cd/m ²	300 cd/m ²	250 cd/m ²
Pixel Pitch	.2766 mm	.24825 mm	.24825 mm	.248 mm x .248 mm	.282 mm	.248 mm
Refresh Rate	55-75 Hz (60 Hz recommended)	56-75 Hz (60 Hz recommended)	56-75 Hz (60 Hz recommended)	56-75 Hz	56-75 Hz (60 Hz recommended)	50-76 Hz (60 Hz recommended)
Power Consumption	28W (1W standby)	35W (1W standby)	25W (0.5W standby) AC 110-220 VAC	52W (1W standby)	52W (1W standby) 100-240 VAC (50/60 Hz)	40W (1W standby)
Input Options	Analog (VGA), Digital (DVI-D w/HDCP)	Analog (VGA), Digital (DVI-D)	Analog (VGA), Digital (DVI-D w/HDCP)	Analog (VGA), HDMI, Digital (DVI-D w/HDCP)	HDMI, Digital (DVI w/HDCP), Analog (VGA)	DisplayPort and VGA
External Connections	1- DVI 24-pin, 1- VGA D-sub 15-pin, 1- 1/8" audio jack, headset jack	1- DVI 24-pin, 1- VGA D-sub 15-pin	1- DVI 24-pin, 1- VGA D-sub 15-pin, 1- 1/8" audio jack, headset jack	1- HDMI 19-pin connector, 1- VGA D-sub 15-pin, 1- 24-pin DVI-D (w/ HDCP), 1- 1/8" audio jack, headset jack	1- HDMI input, 1- DVA/HDCP, 1- Analog VGA D-sub 15-pin video display, 1- Audio input, 1- headphone jack	DisplayPort and VGA
Audio - Built-in Speakers	Yes, TrueMedia™, 1W/ch	No	Yes, TrueMedia™, 1W/ch	Yes	Yes, TrueMedia™, 1W/ch	Yes, 2 x 1W
Features	Anti-glare coating; Multi-language display; On screen display (OSD), Kensington® Security Slot	Anti-glare coating; Multi-language display; On screen display (OSD), Kensington® Security Slot	Anti-glare coating; Multi-language display; On screen display (OSD), Kensington® Security Slot	Offers full HD 1080p resolution; HDMI input and integrated speakers; Fast 5 ms response time, 100 mm VESA mount	Height adjustable stand, swivel, tilt, pivot (also has 100mm VESA on back)	LED Backlit with DisplayPort and VGA Inputs and Integrated Speakers
USB Hub	No	No	No	No	No	No
Pivot	No	No	No	No	Yes	No
Tilt Range	-5° to +19°	-5° to +20°	-0° to +20°	-5° to +19°	-5° to +19°	-5° to +19°
Power Supply	Internal	Internal	External (DC)	Internal	Internal	Internal
Display Active Area (WxH)	21.5" diagonal (17.43" x 9.81")	21.5" diagonal (18.77" x 10.56")	21.5" diagonal (18.77" x 10.56")	21.5" diagonal (18.77" x 10.56")	21.5" diagonal (18.77" x 10.56")	21.5" diagonal (18.90" x 10.68")
Native Resolution	1600 x 900 HD+	1920 x 1080 full HD	1920 x 1080 full HD	1920 x 1080	1920 x 1080, full HD	1920 x 1080, full HD
Dimensions (w/stand) (WxHxD)	18.61" x 14.00" x 6.72"	19.97" x 15.02" x 7.00"	19.94" x 15.35" x 7.0"	20.19" x 14.41" x 7.14"	20.19" x 15.67" x 7.14" (512.7 mm x 398.1 mm x 181.4 mm)	19.91" x 14.40" x 7.08" (505.6 mm x 365.8 mm x 179.79 mm)
Dimensions (w/o stand) (WxHxD)	18.61" x 9.88" x 2.00"	19.97" x 12.34" x 2.30"	19.94" x 12.64" x 1.91"	20.19" x 12.16" x 2.70"	20.19" x 12.16" x 2.70" (512.7 mm x 308.8 mm x 68.5 mm)	19.91" x 14.40" x 2.00" (505.6 mm x 365.8 mm x 50.92 mm)
Weight	6.61 lbs. (net) 9 lbs. (shipping)	9.14 lbs. (net) 12.35 lbs. (shipping)	7 lbs. (net) 10 lbs. (shipping)	9.48 lbs. (net) 13.84 lbs. (shipping)	13.89 lbs. (6.3 kg)	7.71 lbs. (net) 10.97 lbs. (shipping)
Weight (w/o stand)	-	-	-	8.8 lbs.	8.8 lbs. (4 kg)	-
Approvals *Black models TCO '95 certified	FCC-B, CE, UL/cUL, RoHS	FCC-B, CE, UL/cUL, RoHS	cTUVus, CE, Fcc-B, RoHS	CB, UL/CuL, CE, FCC	CB, UL/cUL, CE, FCC	FCC-B, CE, cULus
Customer First™ Warranty	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement
VESA Compatible/Location	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back
Planar® Versatility™ Mount	-	-	-	Fixed Wall/Extended Arm Mounts, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall/Extended Arm Mounts, Dual/Quad Monitor Stands. No adapter required.	Fixed Wall/Extended Arm Mounts, Dual/Quad Monitor Stands. No adapter required.

*Specified at CR≥5:1. All other LCDs specified at CR≥10:1.

Planar Flat Panel Monitors - 24"-27"Widescreen



SPECIFICATIONS	PL2410W - 24" WIDE	PX2411MW - 24" WIDE	PX2491W - 24" WIDE	PX2710MW - 27" WIDE
Planar Part Number	● PL2410W 997-6502-00	● PX2411MW 997-5788-00	PX2491W 997-6198-00	● PX2710MW 997-5984-00
Contrast Ratio (typical)	1000:1	1000:1	1000:1	1200:1
Response Time (typical)	5 ms	2 ms	6 ms	3.4ms (typical), <2ms (gray-to-gray)
Viewing Angle	170° H, 160° V*	170° H, 160° V	178° H, V	170° H, 160° V
Brightness (typical)	300 cd/m ²	300 cd/m ²	250 cd/m ²	300 cd/m ²
Pixel Pitch	.2715 mm	.2715 mm	0.270 mm	.3114 mm
Refresh Rate	55-75 Hz (60 Hz recommended)	56-75 Hz	100-240 VAC, 50/60 Hz	55-76 Hz (60 Hz recommended)
Power Consumption	40W (0.5W standby)	43W (2W standby) 100-240 VAC (50/60 Hz)	65W (nominal)	60W (1W standby)
Input Options	Analog (VGA), Digital (DVI-D w/HDCP)	Analog, HDMI, Digital (DVI-D w/HDCP)	HDMI (1.3), DVI-D, DVI-I	Analog, HDMI, Digital (DVI-D w/HDCP)
External Connections	1- DVI 24-pin, 1- VGA D-sub 15-pin	1- HDMI 19-pin connector, 1- DVI 24-pin connector, 1- Analog VGA D-sub 15-pin video display, 1- 1/8" audio input jack, headset jack	-	HDMI 19-pin connector, D-sub 15-pin, 24-pin DVI-D
Audio - Built-in Speakers	No	Yes, 2 x 2W	-	Yes, 2 x 2W
Features	Anti-glare coating; Multi-language display; On screen display (OSD), Kensington® Security Slot	2 ms (gray-to-gray) response time, HMDI, Dual Analog (VGA) and Digital input; Height adjustable stand with tilt and pivot	-	Glossy finish, fast response time, anti-glare coating, 100 mm VESA mount, snap on base
USB Hub	No	No	-	Yes, 4+1 USB 2.0
Pivot	No	Yes, 90°	-	No
Tilt Range	-2° to +20°	-5° to +21°	-5° to +22°	-0° to +20°
Power Supply	Internal	Internal	Internal	Internal
Display Active Area (WxH)	23.6" diagonal (20.52" x 11.54")	23.6" diagonal (20.60" x 11.75")	-	27" diagonal (23.54" x 13.24")
Native Resolution	1920 x 1080, full HD	1920 x 1080	1920 x 1200	1920 x 1080 full HD
Dimensions (w/stand) (WxHxD)	22.05" x 15.45" x 8.50"	22.1" x 16.5" x 9.8"	22" x 11" x 18" (558.8 mm x 279.4 mm x 457.2 mm)	25.47" x 17.92" x 9.67"
Dimensions (w/o stand) (WxHxD)	22.05" x 13.815" x 2.63"	22.1" x 13.2" x 2.7"	22" x 3.75" x 14.7" (558.8 mm x 95 mm x 373 mm)	25.47" x 15.72" x 2.60"
Weight	10.80 lbs. (net) 13.67 lbs. (shipping)	11.7 lbs. (net) 14.9 lbs. (shipping)	23.7 lbs. (shipping)	13.87 lbs. (net) 17.64 lbs. (shipping)
Weight (w/o stand)	-	10.8 lbs.	-	13.07 lbs.
Approvals *Black models TCO '95 certified	FCC-B, CE, UL/cUL, RoHS	UL/cUL, CE, FCC-B	UL, cUL, CE	FCC-B, CE, cTUVus, TUV/Baurat
Customer First™ Warranty	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement	3-Year - featuring FREE 2-Day Advance Replacement
VESA Compatible/Location	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm VESA, back	Built-in 100 mm x 100 mm VESA, back
Planar® Versatility™ Mount	-	Fixed Wall/Extended Arm Mounts, Dual/Quad Monitor Stands. No adapter required.	-	-

*Specified at CR≥5:1. All other LCDs specified at CR≥10:1.

Accessories and Services



Asset Tagging Services

Asset Tagging Services Available.
Contact bids@planar.com for a quote.
Minimum 500 pieces.



Wall Mount - Fixed

Part# 997-5546-00

Affordable, easy to install wall mount with multiple adjustment features. Effortless torque adjustment and a safety lock for permanent positioning. Supports LCD monitors up to 24" and under 33 lbs. with a 75 or 100 mm VESA pattern.



Wall Mount - Extended Arm

Part# 997-5547-00

Affordable, easy to install wall mount with multiple adjustment features. Swing arm that has the flexibility to extend out 17.5" from the wall or folds in 3.4" from the wall. Built-in covers to hide monitor cables for a clean, organized look. Supports LCD monitors up to 24" and under 33 lbs. with a 75 or 100 mm VESA pattern.

AS2 Black Dual Monitor Stand

Part# 997-5253-00

Planar's dual monitor stand maximizes the benefits of two monitors - from 17" to 24" with maximum weight of 33 lbs. per display - by making it easier to toggle between applications with the seamless display setup. The stand helps to organize displays cables with a cable organizer, and can tilt, swivel, rotate and height adjust. Installation is quick and easy.

TS732 Large Dual Monitor Stand

Part# 997-6504-00

Planar's large dual monitor stand maximizes the benefits of two monitors - from 24" to 32" with maximum weight of 26 lbs. per display - by making it easier to toggle between applications with the seamless display setup. The stand helps to organize displays cables with a cable organizer, and can tilt, swivel, rotate and height adjust. Installation is quick and easy.

Triple Monitor Stand

Part# 997-6035-00

Planar's triple monitor stand maximizes the benefits of three monitors by making it easier to toggle between applications with the seamless display setup. The stand helps to organize displays cables with a cable organizer, and can tilt, swivel, rotate and height adjust. Installation is quick and easy.

TS744 Quad Monitor Stand

Part# 997-5602-00

Planar's quad monitor stand maximizes the benefits of four monitors - from 17" to 24" with maximum weight of 33 lbs. per display - by making it easier to toggle between applications with the seamless display setup. The stand helps to organize displays cables with a cable organizer, and can tilt, swivel, rotate and height adjust. Installation is quick and easy.



R50L Thin Client Bracket

Part# 997-5798-00

Attach a Wyse® R50L Thin Client to a PT15/PT17/PT19 Touch Monitor using the VESA hole pattern on the back of the monitor (75 mm for 15" monitors and 100mm for 17" and 19" monitors). Perfect for mounting your monitor and thin client to a medical cart, swing arm or wall mount. Comes standard with 18" VGA cable and 18" USB cable.



C- and S-Series Thin Client Bracket

Part# 997-3185-00

Attach a Wyse® C- or S-Series Thin Client to a PT15/PT17/PT19 Touch Monitor using the VESA hole pattern on the back of the monitor (75 mm for 15" monitors and 100 mm for 17" and 19" monitors). Perfect for mounting your monitor and thin client to a medical cart, swing arm or wall mount. Comes standard with 18" VGA cable and 18" USB cable.



V-Series Thin Client Bracket

Part# 997-3283-00

Attach a Wyse® V-Series Thin Client to a PT17/PT19 Touch Monitor using the VESA hole pattern on the back of the monitor (100 mm for both 17" and 19" monitors). Perfect for mounting your monitor and thin client to a medical cart, swing arm or wall mount. Comes standard with 18" VGA cable and 18" USB cable.



NVIDIA 3D Vision Kit

Part# 955-0214-00LF

NVIDIA 3D Vision Extra Glasses

Part# 955-0215-00LF

3D Vision PRO Kit

Part# 997-0213-00LF

3D Vision PRO Extra Glasses

Part# 997-0216-00LF



ProGlow™ Keyboard

Part# 955-0211-00LF