

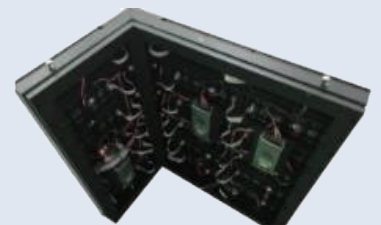




## Planar LSON Series

Designed for outdoor applications - Irregular shapes

- ▶ Aluminium Cabinet
- ▶ High operating temperature 60-degree Max
- ▶ High Brightness up to 7000 nits
- ▶ IP65 Front and side
- ▶ Customized shapes available

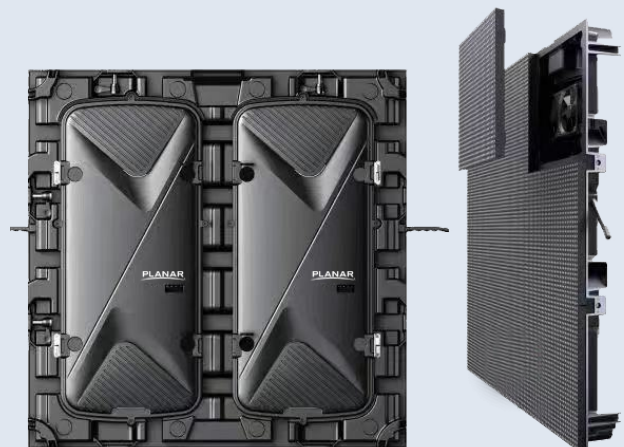

# Specifications

Model	LSON3.9	LSON4	LSON4.8	LSON5	LSON6	LSON8	LSON10
<b>Pixel</b>	3.9mm	4mm	4.8mm	5mm	6.67mm	8mm	10mm
<b>Pixel Idensity</b>	65536/m <sup>2</sup>	62500/m <sup>2</sup>	43264/m <sup>2</sup>	40000/m <sup>2</sup>	22500/m <sup>2</sup>	15625/m <sup>2</sup>	10000/m <sup>2</sup>
<b>Module size</b>	250 x 250mm	320 x 160mm	250 x 250mm	320 x 160mm	320 x 160mm	320 x 160mm	320 x 160mm
<b>Cabinet size</b>	1000 x 1000mm	960 x 960mm	1000 x 1000mm	960 x 960mm	960 x 960mm	960 x 960mm	960 x 960mm
<b>Drive mode</b>	1/8scan	1/10 scan	1/6 scan	1/6 scan	1/6 scan	1/4 scan	1/2 scan
<b>Brightness</b>	5000~6000cd/m <sup>2</sup>				5500~7500cd/m <sup>2</sup>		
<b>Material</b>	die-casting Aluminum cabinet						
<b>Weight</b>	40kg/sqm						
<b>Gray level</b>	65536						
<b>Color process</b>	14~16 bits						
<b>Refresh rate</b>	>3840 Hz						
<b>Viewing angle</b>	140°(H)/120°(V)						
<b>Input Voltage</b>	AC110~240V						
<b>Input frequency</b>	50/60Hz						
<b>Power consumption M</b>	750W/m <sup>2</sup>						
<b>Power consumption A</b>	250W/m <sup>2</sup>						
<b>Working Temperature</b>	-20°C~50°C						
<b>Working humidity</b>	10%~95%						
<b>IP level(F/R)</b>	IP65/IP65						
<b>Service method</b>	Front/Rear						

For more information, click to visit: [www.planar.com/regions/international](http://www.planar.com/regions/international)

Planar is a trademark of Planar Systems, Inc. All other trademarks and service marks are property of their holders. Copyright © 2024 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without permission from Planar. Information in this document is subject to change without notice. 5/2025