




Planar DirectLight Essential Series

LED Video Walls

- ▶ 0.7, 0.9, 1.2 and 1.5mm pixel pitches
- ▶ Featuring COB LED technology for enhanced reliability and image quality
- ▶ 30,000:1 contrast ratio for deeper blacks and sharper visuals
- ▶ Compatible with multiple controllers
- ▶ U.S. TAA and ADA compliant



The Planar® DirectLight® Essential Series is a line of fine pixel pitch LED video walls that deliver stunning visual performance tailored for budget-conscious indoor applications. Designed with COB (Chip-on-Board) technology, these TAA-compliant video wall displays offer higher pixel density and increased durability compared to traditional LED designs. The result is an exceptional viewing experience with improved brightness, deeper blacks and a high contrast ratio—perfect for high-traffic indoor environments with abundant ambient light.

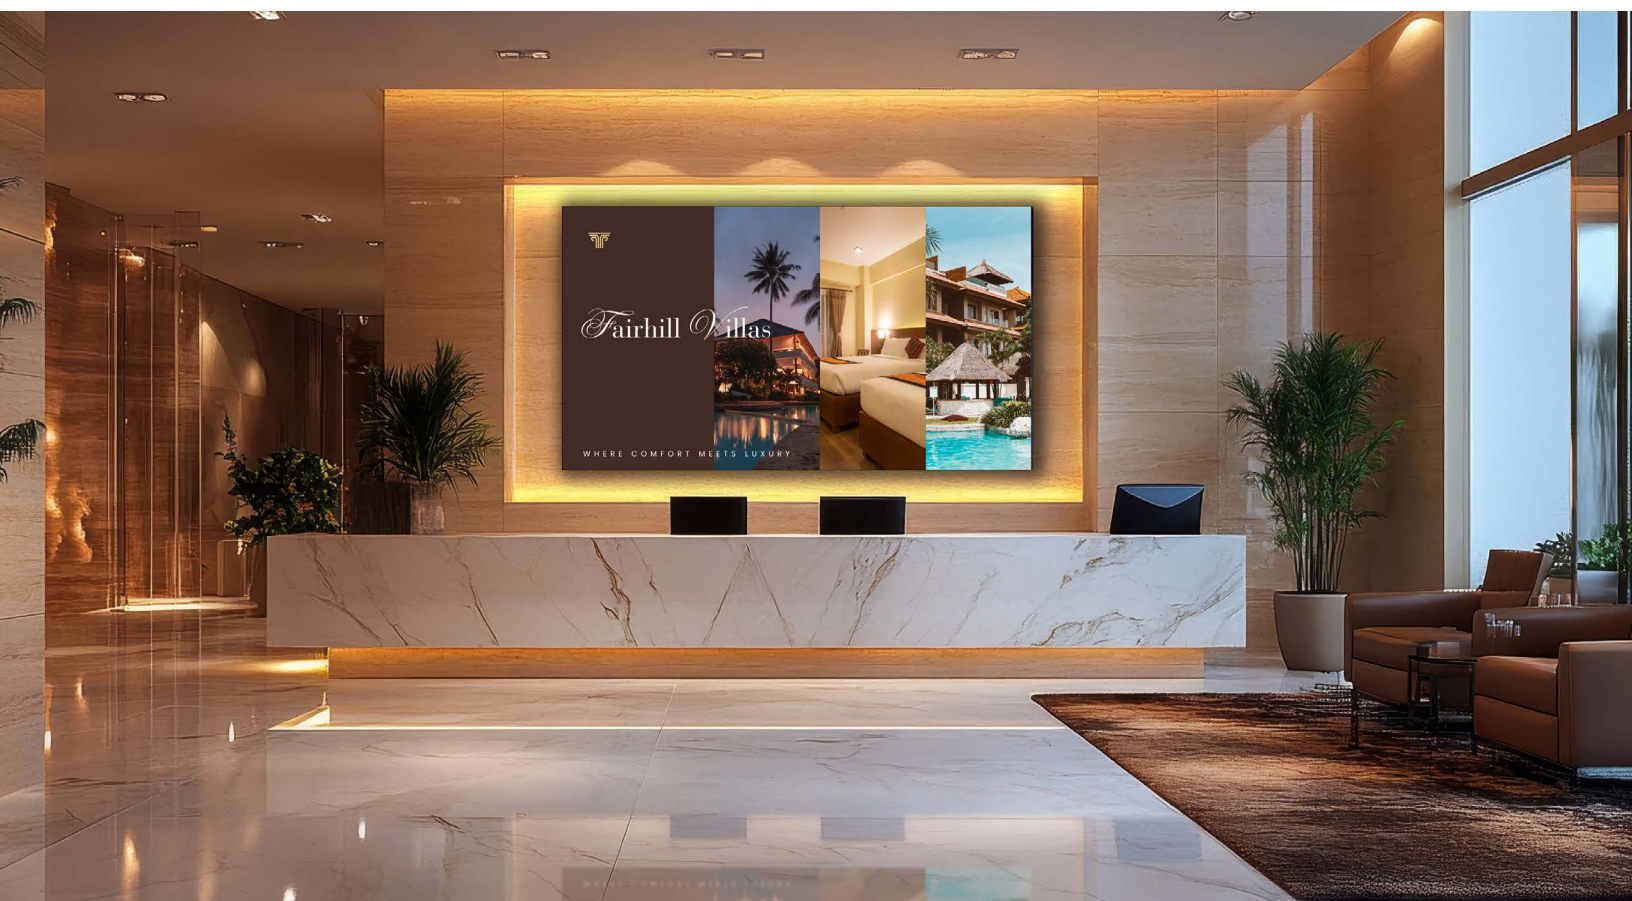



Performance Meets Value

Planar DirectLight Essential Series offers exceptional value, combining vivid image quality, durable COB technology and energy efficiency at an accessible cost. It's the ideal entry point to the Planar DirectLight portfolio of fine pitch LED solutions for budget-conscious projects.




Durability That Delivers

The Planar DirectLight Essential Series is built tough with COB LED technology, reducing failure points and stress on components. The result is exceptional durability, water resistance and lasting reliability, making it ideal for challenging indoor environments.



Energy-Efficient Design

COB LED technology featured in Planar DirectLight Essential Series offers energy efficiency by reducing power consumption while enhancing visual quality. Its design maximizes light output and minimizes energy loss, delivering bright, consistent visuals with lower operating costs. Efficient heat dissipation and a longer lifespan ensure stable, long-term performance.

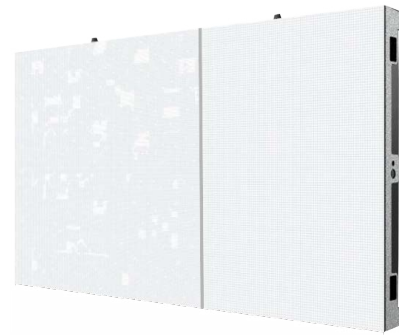

COB LEDs Matched for Visual Uniformity

During the manufacturing process for Planar DirectLight Essential Series, each individual COB LED is quality-tested to ensure consistent color temperature and brightness, ensuring smooth, uniform visuals.



Flexible Control

Planar® WallDirector™ Video Controller offers robust default processing while compatibility with Colorlight gives customers the freedom to choose the ideal solution for their application's unique requirements.



Made for America

The series is TAA compliant, making it an ideal solution for organizations and projects that require products in approved Trade Agreements Act-designated countries. The series supports procurement requirements while delivering the premium visual performance and commercial-grade reliability expected from Planar.

Tailor Your Video Wall

Configure a Planar DirectLight Essential Series video wall to precisely match Full HD (1920×1080) or 4K (3840×2160) resolution based on your chosen pixel pitch and available installation space. Whether you're working with a compact space or building a large-scale display, the modular design makes it easy to scale to your resolution needs.

Full HD

1920 x 1080

4K

3840 x 2160



Models	3 x 3	4 x 4	5 x 5	6 x 6	8 x 8	10 x 10
DLE 0.7			4K			
DLE 0.9	Full HD			4K		
DLE 1.2		Full HD			4K	
DLE 1.5			Full HD			4K

Off-the-Shelf Planar DirectLight Essential Complete Video Walls

To reduce the time, complexity, and cost of designing and installing a video wall, the Planar DirectLight Essential Series is available in convenient pre-configured video wall solutions.

Simply select the video wall size and resolution that best suits the environment and application, and receive the complete package, including the powerful Planar® WallDirector™ Video Controller.

INCLUDED:

- LED Display Cabinets
- Video Controller
- Remote Control
- Wall Mounts
- Trim
- Cables
- Spare Modules



Available Sizes

109"

136"

163"

Specifications

Model	DLE 0.7	DLE 0.9	DLE 1.2	DLE 1.5
Pixel Pitch (mm)	0.78	0.93	1.25	1.56
Cabinet Dimensions (mm)	600 x 337.5 x 40.4			
Cabinet Weight (kg)	4.4			
Cabinet Resolution (pixels)	768 x 432	640 x 360	480 x 270	384 x 216
Module per Cabinet	4 x 2			2 x 2
Module Dimensions (mm)	150 x 168.75			300 x 168.75
Module Resolution (pixels)	192 x 216	160 x 180	120 x 135	192 x 108
Max. Brightness (nits)	1,500		1,000	700
Contrast	30,000:1			
Color Temperature (K)	3,000 - 10,000 Adjustable			
Horizontal Viewing Angle	170°			
Vertical Viewing Angle	150°			
Refresh Rate (Hz)	3,840			
Power Consumption, Maximum	120 W/Cabinet 593 W/SqM 55.1 W/Sq Ft			
Power (V-AC)	100-240			
Power Supply	Single			
Operating Temperature (°C)	-10 to 40			
Operating Humidity Range	10% to 80%			
Storage Temperature (°C)	-20 to 60			
Storage Humidity	10% to 85%			
TAA Compliant	Optional			
ADA Compliant	Yes			
Typical Lifetime (hours)	100,000			
Service Access	Front			

Model	Complete HD 109"	Complete HD 136"	Complete 4K 136"	Complete 4K 163"
Pixel Pitch (mm)	1.25	1.56	0.78	0.93
Display Dimensions (mm)	2,400 x 1,350	3,000 x 1,687.5	3,000 x 1,687.5	3,600 x 2,025
Display Size Diagonal	108.4"	135.5"	135.5"	162.6"
Display Resolution (pixels)	1920 x 1080	1920 x 1080	3,840 x 2,160	3,840 x 2,160
Max. Brightness (nits)	1,000	700	1,500	1,500
Video Controller	WallDirector VC			
Max. Video Input Resolution	4K, 60Hz			
Ports	4x HDMI 2.0, 4x SFP+, 2x Display Port 1.4, RJ45, USB A, USB B			
Viewing Distance	7 to 14'	9 to 16'	9 to 16'	11 to 20'
Power Consumption, Maximum	1,920	3,000	3,000	4,320
Accessories	IR Remote Control, Planar Tool Kit, Wall Mount, Trim, Spare Modules, USB			
Warranty	Planar Standard 3-Year Warranty			