





## Planar LSRSO Series

LED Video Wall


- ▶ *Easy Installation and Maintenance*
- ▶ *Innovative patented flatness non-slip balance lock assembly*
- ▶ *Improved Heat Dissipation Efficiency-210%*
- ▶ *Cabinet Material-High thermal conductivity aluminum profile*

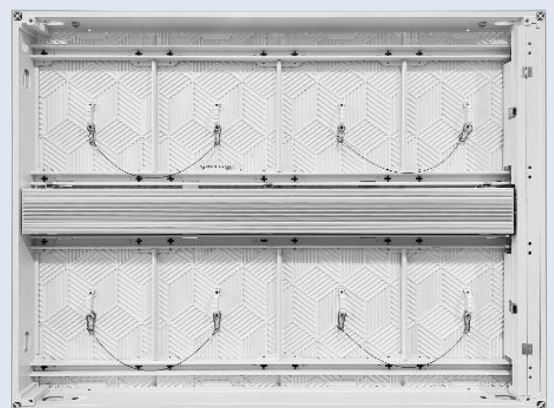

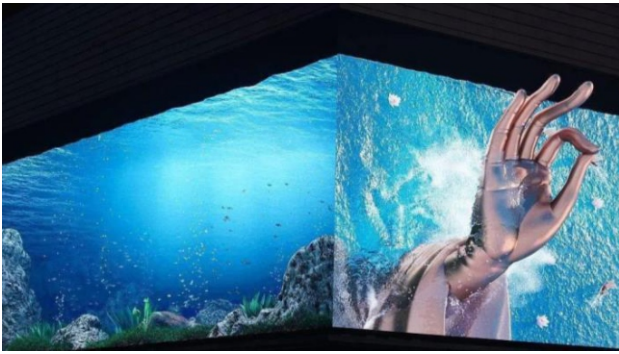

## Right Angle Installation

Can support 90 degree right angle installation to achieve naked eye 3D

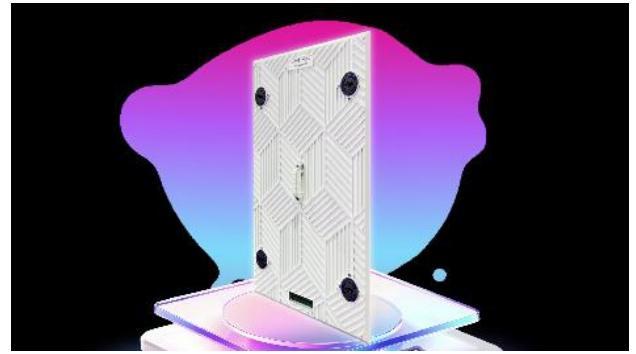

## Superior protection

Front and rear protection up to IP69K/IP65

## Specifications

Model	LSRSO 2.9	LSRSO 3.9	LSRSO 4.8	LSRSO 6.67	LSRSO 8	LSRSO 10
<b>Pixel Pitch</b>	2.9mm	3.9mm	4.8mm	6.67mm	8mm	10mm
<b>Module Size (WxH)</b>	250 x 250mm	500 x 250mm	500 x 250mm	480 x 320mm	480 x 320mm	480 x 320mm
<b>Pixel Density</b>	112896dots/m <sup>2</sup>	65536dots/m <sup>2</sup>	43264dots/m <sup>2</sup>	22500dots/m <sup>2</sup>	15625dots/m <sup>2</sup>	10000dots/m <sup>2</sup>
<b>Module Pixel / Panel (WxH)</b>	84 x 84	128 x 64	104 x 52	72 x 48	60 x 40	48 x 32
<b>Cabinet Size (WxH)</b>	500 x 500mm	500x1000mm 500x1500mm	500x1000mm 500x1500mm	960 x 960mm	960 x 960mm	960 x 960mm
<b>Brightness (correction on)</b>	5000~6500cd/m <sup>2</sup>	6000~7000cd/m <sup>2</sup>	6000~7000cd/m <sup>2</sup>	6000~8000cd/m <sup>2</sup>	6000~10000cd/m <sup>2</sup>	6000~10000cd/m <sup>2</sup>
<b>Scan model</b>	21S	16S	13S	6S	4S	2S
<b>Max Power Consumption</b>		550w/m <sup>2</sup>			600w/m <sup>2</sup>	
<b>Avr Power Consumption</b>		180w/m <sup>2</sup>			200w/m <sup>2</sup>	
<b>Screen Weight</b>		32kg/m <sup>2</sup>			35kg/m <sup>2</sup>	
<b>LED Model</b>	SMD					
<b>Working Voltage</b>	AC100-240V/50/60Hz					
<b>Cabinet Material</b>	Aluminum					
<b>Grey Scale</b>	≥14bit					
<b>Refresh Rate</b>	>3840Hz					
<b>Contrast</b>	>9000:1					
<b>Color Temperature (after calibration)</b>	3000-10000K					
<b>Protection (F/R)</b>	IP69K/IP65					
<b>Operating Temperature/ Humidity</b>	-20~70°C   10%~95%					

Model	LSRSO 6.25	LSRSO 8.33	LSRSO 10
<b>Pixel Density</b>	25600dots/m <sup>2</sup>	14400dots/m <sup>2</sup>	10000dots/m <sup>2</sup>
<b>Module Pixel / Panel (WxH)</b>	64 x 48	48 x 36	40 x 30
<b>Scan Model</b>	6s	3s	2s
<b>LED Model</b>	SMD2727		
<b>Module Size (WxH)</b>	400 x 300mm		
<b>Cabinet Size (WxH)</b>	800 x 900mm		
<b>Cabinet Material</b>	Aluminum		
<b>Screen Weight</b>	35kg/m <sup>2</sup>		
<b>Brightness Max (correction on)</b>	6000~10000cd/m <sup>2</sup>		
<b>Grey Scale</b>	≥14bit		
<b>Refresh Rate</b>	>3840Hz		
<b>Contrast</b>	>9000:1		
<b>Color Temperature (after calibration)</b>	3000-10000K		
<b>Protection (F/R)</b>	IP69K / IP65		
<b>Working Voltage</b>	AC100-240V/50/60Hz		
<b>Max Power Consumption</b>	600w/sqm		
<b>Avr Power Consumption</b>	200w/sqm		
<b>Operating Temperature / Humidity</b>	-20~60°C 10%~95%		
<b>Life Time</b>	100,000h		

Model	LSRSO 6.25	LSRSO 7.81	LSRSO10.4
<b>Pixel Density</b>	25600dots/m <sup>2</sup>	16384dots/m <sup>2</sup>	9216dots/m <sup>2</sup>
<b>Module Pixel / Panel (WxH)</b>	80 x 40	64 x 32	48 x 24
<b>Scan Model</b>	5s	4s	2s
<b>LED Model</b>	SMD2727		
<b>Module Size (WxH)</b>	500 x 250mm		
<b>Cabinet Size (WxH)</b>	1000 x 1000mm		
<b>Cabinet Material</b>	Aluminum		
<b>Screen Weight</b>	35kg/m <sup>2</sup>		
<b>Brightness Max (correction on)</b>	6000~10000cd/m <sup>2</sup>		
<b>Grey Scale</b>	≥14bit		
<b>Refresh Rate</b>	>3840Hz		
<b>Contrast</b>	>9000:1		
<b>Color Temperature (after calibration)</b>	3000-10000K		
<b>Protection (F/R)</b>	IP69K / IP65		
<b>Working Voltage</b>	AC100-240V/50/60Hz		
<b>Max Power Consumption</b>	600w/sqm		
<b>Avr Power Consumption</b>	200w/sqm		
<b>Operating Temperature / Humidity</b>	-20~60°C 10%~95%		
<b>Life Time</b>	100,000h		

For more information, click to visit: [www.planar.com/regions/international](http://www.planar.com/regions/international)

Planar is a trademark of Planar Systems, Inc. All other trademarks and service marks are property of their holders. Copyright © 2024 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without permission from Planar. Information in this document is subject to change without notice. 7/2025