




## Planar LSFTG Series

Designed for indoor/outdoor glass facade




1000x500mm

- ▶ Front rear access
- ▶ Ultra-light and ultra-slim 5kg/cabinet, Thickness 65mm
- ▶ Higher transparency >45%
- ▶ High brightness up to 5500cd/m<sup>2</sup> Max(Customized)
- ▶ Cabinet customized is available (Convex design)
- ▶ Frame hidden is optional
- ▶ Energy saving & higher refresh rate >3840Hz

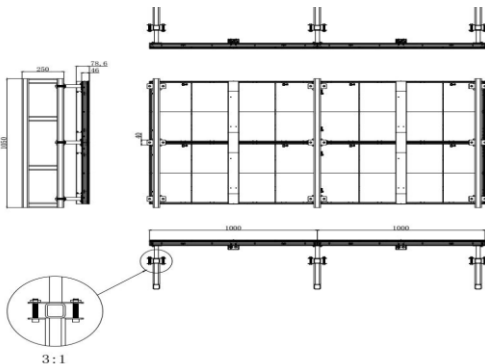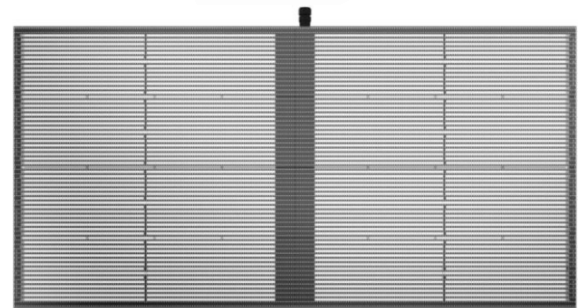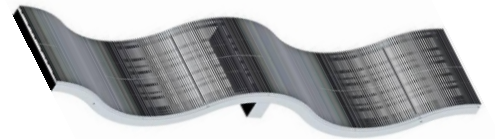

Fixed Installation

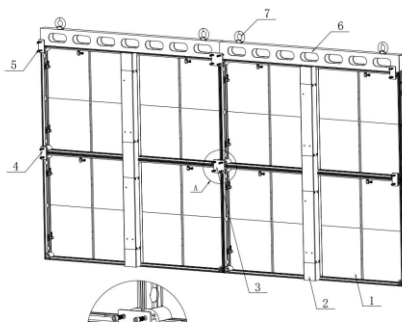

Hanging Installation



# Specifications

Model	LSFTG2.6/5.2	LSFTG2.8/5.6	LSFTG3.9/7.8	LSFTG7.8/7.8	LSFTG10.4/10.4
<b>Pixel Distance</b>	vertical 5.2mm horizontal 2.6mm	vertical 5.6mm horizontal 2.8mm	vertical 7.8mm horizontal 3.9mm	vertical 7.8mm horizontal 7.8mm	vertical 10.4mm horizontal 10.4mm
<b>Unit Resolution</b>	384 x 96dots	384 x 64dots	256 x 64dots	128 x 64dots	96 x 48dots
<b>Max Power consumption</b>	800w/m <sup>2</sup>	800w/m <sup>2</sup>	≤750w/m <sup>2</sup>	≤750w/m <sup>2</sup>	≤750w/m <sup>2</sup>
<b>Ave Power consumption</b>	≤260w/m <sup>2</sup>	≤260w/m <sup>2</sup>	≤250w/m <sup>2</sup>	≤250w/m <sup>2</sup>	≤250w/m <sup>2</sup>
<b>Driving scan</b>	1/10scan	1/13scan	1/16scan	1/8scan	1/4scan
<b>Pixel density</b>	73,728dots/m <sup>2</sup>	63368dots/m <sup>2</sup>	32768dots/m <sup>2</sup>	16384dots/m <sup>2</sup>	9216dots/m <sup>2</sup>
<b>Transparency</b>	≥50%	≥50%	≥60%	≥70%	≥80%
<b>Cabinet Dimension</b>	1000 x 500mm				
<b>Screen Weight</b>	10kg/sqm				
<b>Power Input</b>	AC110-AC120V/AC220V-AC240V				
<b>Brightness</b>	800~5000cd/m <sup>2</sup>				
<b>Viewing angle</b>	140°/140°				
<b>Refresh rate</b>	>3840Hz				
<b>Gray scale</b>	16 bits				
<b>Life</b>	100,000h				
<b>Working temperature</b>	-20°C~+40°C				
<b>Working humidity</b>	15%-80%RH				
<b>IP rating</b>	IP30/IP20				
<b>Maintenance</b>	Front/back access				

# Specifications

Model	LSFTGO3.9-7.8	LSFTGO5.2-10.4	LSFTG7.8-7.8	LSFTGO10.4-10.4
<b>Pixel Distance</b>	vertical 7.8mm horizontal 3.9mm	vertical 10.4mm horizontal 5.2mm	vertical 7.8mm horizontal 7.8mm	vertical 10.4mm horizontal 10.4mm
<b>Unit Resolution</b>	256 x 64dots	192 x 48dots	128 x 64dots	96 x 48dots
<b>Pixel density</b>	32,768dots/m <sup>2</sup>	18,432dots/m <sup>2</sup>	16,384dots/m <sup>2</sup>	9216dots/m <sup>2</sup>
<b>Transparency</b>	≥60%	≥65%	≥60%	≥65%
<b>Driving scan</b>	Constant current			
<b>Cabinet Dimension</b>	1000 x 500mm			
<b>Screen Weight</b>	12kg/sqm			
<b>Max Power consumption</b>	≤800w/m <sup>2</sup>			
<b>Ave Power consumption</b>	≤260w/m <sup>2</sup>			
<b>Power Input</b>	AC110-AC120V/AC220V-AC240V			
<b>Brightness</b>	3500~5000cd/m <sup>2</sup>			
<b>Viewing angle</b>	140°/120°			
<b>Refresh rate</b>	3840Hz			
<b>Gray scale</b>	14 bits			
<b>Life</b>	100,000h			
<b>Working temperature</b>	-20°C~+50°C			
<b>Working humidity</b>	10%-90%RH			
<b>IP rating</b>	IP65/IP65			
<b>Maintenance</b>	Front/back access			

For more information, click to visit: [www.planar.com/regions/international](http://www.planar.com/regions/international)

Planar is a trademark of Planar Systems, Inc. All other trademarks and service marks are property of their holders. Copyright © 2024 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without permission from Planar. Information in this document is subject to change without notice. 5/2025