




# Planar Luminate Pro Series

Outdoor LED  
Video Wall Displays

- ▶ *2.5, 2.9mm pixel pitches*
- ▶ *Angle blocks for concave & convex curves*
- ▶ *Single-person handling*
- ▶ *Hang, stack or wall mount*

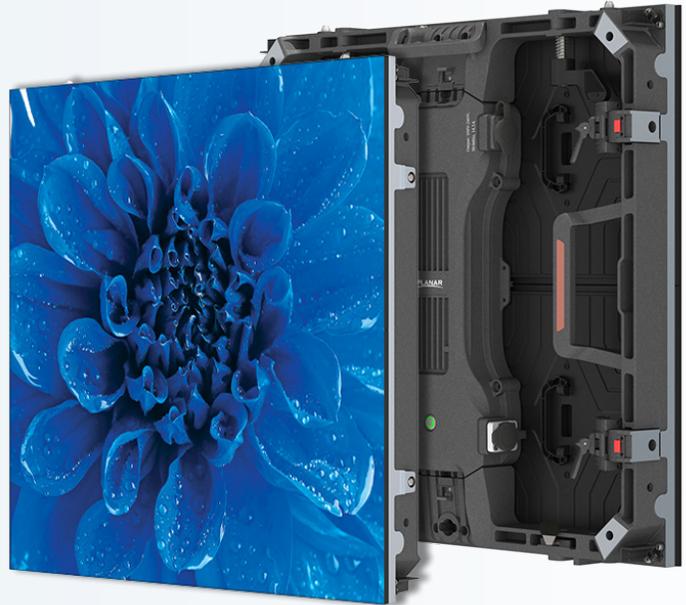

Planar<sup>®</sup> Luminate<sup>™</sup> Pro Series outdoor high-brightness LED video wall displays shine in the daylight and are designed to meet the fast-paced needs of temporary event applications and fixed installation. They offer easy front or rear-service access to electronics for deployment versatility and cabinets with a quick-lock system support single-person handling.

---

## Outdoor Infotainment

For outside daytime events and digital signage such as movies in the park, speeches, concerts and athletics, high-bright, quick-install Planar Luminate Pro Series LED video walls deliver comfortable, seamless viewing from as close as 14 feet.





## Weatherproof

The displays feature a dust-tight enclosure to protect the LED display in harsh outdoor conditions, earning them an IP65 Ingress Protection Rating.




## Bright in the Light

The displays are suitable for daylight applications offering up to 4,500-nit brightness, ideal for sports, concerts, cinema and digital signage even in direct sunlight.




## Corner Protection

Built-in, 90-degree, retractable guards help avoid damage to LEDs near the corners during setup, teardown and transportation.

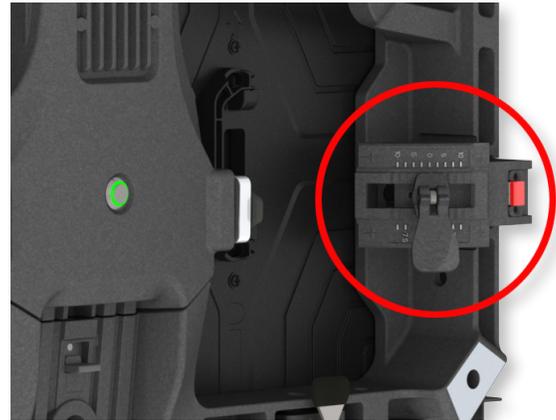

## Curve Capable

On-board angle blocks enable connected cabinets to effortlessly, and securely, form convex or concave video walls with up to +/-10 degrees of curve.

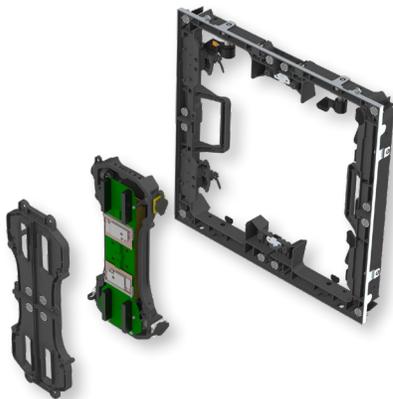

## Compact Components

All electronics are contained in single compartment on the back of the cabinet. The electronics compartment can be accessed from the front or back and easily removed.



## Front or Rear Service

When in use, the display's modular design offers full front or rear access to electronics, enabling more installation options and making any needed maintenance and service simpler.

# Specifications

Model	LPO-2.5	LPO-2.9
<b>Pixel Pitch (mm)</b>	2.5	2.9
<b>Cabinet Size (W x H x D)</b>	19.69"x19.69"x2.48"   500x500x63mm	
<b>Cabinet Diagonal</b>	27.83" (707.10mm)	
<b>Cabinet Area (m<sup>2</sup>)</b>	0.25	
<b>Cabinet Resolution</b>	200x200	168x168
<b>LEDs per Cabinet</b>	40,000	28,224
<b>Modules/Cabinet (W x H)</b>	2x2	
<b>Module Size (W x H)</b>	250x250mm	
<b>Power Consumption, Maximum (watts)</b>	145	145
<b>Line Voltage</b>	100~240v AC, 50/60Hz	
<b>Cabinet Weight (per display)</b>	≤ 17.64lbs	
<b>Cabinet Weight (per m<sup>2</sup>)</b>	≤ 70.55lbs	
<b>Brightness Max, Calibration On (cd/sq)</b>	4,000	4,000
<b>Supported Frame Rate</b>	50Hz/60Hz	
<b>Color Temperature (K)</b>	3,000-10,000 adjustable	
<b>Contrast</b>	5,000:1	
<b>Viewing Angle (50% of brightness)</b>	>160° horizontal; >160° vertical	
<b>Mounting Orientation</b>	Wall mount, faceted, hanging, stacking	
<b>Installation/Service</b>	Front or Rear	
<b>Refresh Rate</b>	3,840Hz	
<b>LED Lifetime (50% brightness)</b>	100,000hrs	
<b>Operating Temp/Humidity (degrees F/C)</b>	-22° to 50° C   -34° to 122° F (10-80% RH, non-condensing)	
<b>Storage Temp/Humidity (degrees F/C)</b>	-40° to 60° C   -40° to 140° F (10-85% RH, non-condensing)	
<b>IP Rating</b>	IP65 Front/Back	
<b>Warranty</b>	3 years	

For more information, click to visit: <https://www.planar.com/luminate-pro>

Planar is a trademark of Planar Systems, Inc. All other trademarks and service marks are property of their holders. Copyright © 2025 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without permission from Planar. Information in this document is subject to change without notice. 10/2025