




# Planar CarbonLight CLI VX2.6 B

## LED Video Wall

Planar® CarbonLight™ CLI VX2.6 B is a carbon fiber-framed indoor LED video wall display with adaptable design suitable for hanging, wall mounting and free-standing installations. Its narrow 2.6mm pixel pitch, high frame rate, genlock compatibility and wide color gamut make it ideal for on-camera virtual production and extended reality.

Planar CarbonLight CLI VX2.6 B is specifically designed to maximize the capabilities of Brompton Technology® video controllers.

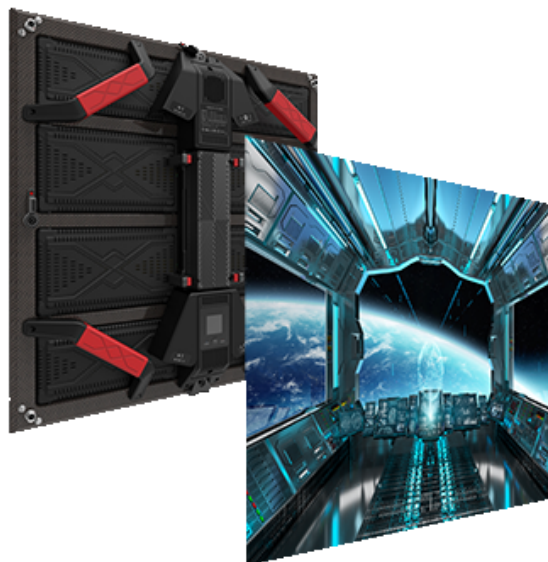

SPECIFICATION	DETAIL
Planar Model	CLI VX2.6 B
Pixel Pitch	2.60
Cabinet Resolution	192 x 192
Pixel Density	147,456/m <sup>2</sup>   13,692/ft <sup>2</sup>
Cabinet Size (W x H x D)	500 x 500 x 63mm   19.69 x 19.69 x 2.48in
Cabinet Diagonal	707.1mm   27.8in
Cabinet Area	0.25m <sup>2</sup>   2.69ft <sup>2</sup>
Modules/Cabinet (W x H)	2 x 4
Module Size	250x125mm   9.84x4.92in
Power Consumption, Maximum (watts)	225/Cabinet   900/m <sup>2</sup>
Line Voltage	100-240V AC, 50/60Hz
Cabinet Weight (per display)	4.1kg   9.04lbs
Cabinet Weight (per m <sup>2</sup> )	16.4kg   36.16lbs
Brightness	1500
Contrast Ratio	4000:1
LED Refresh Rate	3840Hz

<b>Frame Rate (Processor dependent)</b>	24~144Hz
<b>Color Temperature, Adjustable (k)</b>	3,000 - 9,000
<b>Viewing Angle, Horizontal</b>	140°
<b>Viewing Angle, Vertical</b>	140°
<b>Installation and Service Access</b>	Front (modules), Rear
<b>Grey Scale Processing</b>	16bit
<b>Operating Temperature/Humidity (degrees F/C, relative humidity)</b>	-20° to 40° C   -4° to 104° F 10-80%
<b>Storage Temperature/Humidity (degrees F/C, relative humidity)</b>	-35° to 60° C   -31° to 140° F 10-80%
<b>LED Lifetime: Typical</b>	100,000
<b>Power Supply</b>	Single
<b>Cooling</b>	Fan: programmable
<b>Acoustic Noise</b>	34db
<b>Regulatory Compliance</b>	tbd
<b>Active Cooling</b>	Yes

For more information, please visit [www.planar.com](http://www.planar.com)

*Specifications are subject to change without notice.*

*Specification Report Date: 9/16/2021*

*© Copyright 2021 Planar Systems, Inc. All rights reserved*