




# Planar DirectLight X

## DLX-0.7

DLX-0.7

The Planar® DirectLight® DLX-0.7 is a fine pitch LED video wall display with a 0.7 millimeter pixel pitch. With the off-board Planar® Video Controller, Planar DLX-0.7 is the industry's first LED video wall solution to embed advanced video processing directly into the product. Planar DLX-0.7 includes a 27" cabinet with a 16:9 aspect ratio designed for Ultra HD resolution, an industry-leading wall mount, full front service access, off-board hot-swap power supplies and modern, web-based control and management software.

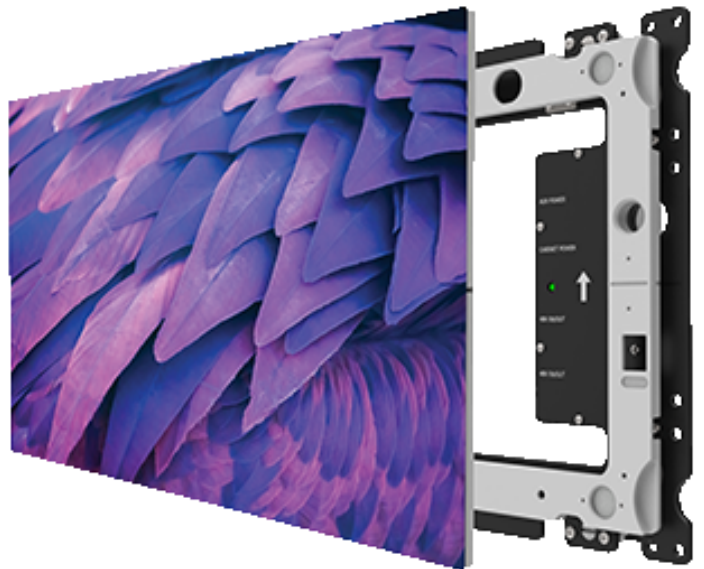

SPECIFICATION	DETAIL
Product Name	DLX-0.7
Pixel Pitch	0.781mm
LED Type	Commercial grade 3-in-1 Black SMD
Cabinet Resolution	768 x 432
LEDs per Cabinet	331,776
Pixel Density	1,638,400 / sq m   152,212 / sq ft
Cabinet Size (W x H x D)	600 x 337.5 x 95mm   23.62 x 13.28 x 3.74in
Cabinet Diagonal	688.5mm   27.1in
Cabinet Area	0.2025/sq m   2.18/sq ft
Modules/Cabinet (W x H)	4 x 2
Module Resolution	192 x 216
LEDs per Module	41,472
Module Size	150 x 168.75mm   5.91 x 6.64in
Power Consumption, Maximum (watts)	150 / Cabinet   741 / sq m
Power Consumption, Typical (watts)	50 / Cabinet   247 / sq m
Line Voltage	100-240V AC, 50/60Hz autoranging

<b>Cabinet Weight (per display)</b>	6.6 kg   14.5 lb
<b>Cabinet Weight (per m<sup>2</sup>)</b>	32.6 kg / sq m   71.6 lbs / sq m
<b>Mount Weight per Cabinet (kg / display)</b>	3.2 kg   7 lb
<b>Mount Weight per Cabinet (kg / sq m)</b>	15.8 kg / sq m   34.6 lbs / sq m
<b>Mounted Depth</b>	<4", ADA Compliant
<b>Brightness Max (cd / sq m)</b>	>400
<b>Contrast Ratio</b>	> 6,000:1
<b>Brightness Uniformity</b>	>97%
<b>Color Uniformity</b>	>97%
<b>Color Gamut</b>	100% NTSC
<b>LED Refresh Rate</b>	1,920 Hz
<b>Color Temperature, Adjustable (k)</b>	3,200 - 9,300
<b>Viewing Angle, Horizontal</b>	160°
<b>Viewing Angle, Vertical</b>	140°
<b>Video Inputs (LED Cabinet)</b>	2x HDMI in, 2x HDMI out; HDCP Compliant
<b>Video Input Resolution Maximum</b>	1920 x 1080 @ 60Hz
<b>Frame Rate</b>	50, 60Hz
<b>Control Input Type</b>	RS232 or Ethernet
<b>Gray Scale Processing</b>	16-bit per color processing, 10-bit per color displayed
<b>Installation and Service Access</b>	Front
<b>LED Lifetime: Typical</b>	100,000 hrs
<b>Environment</b>	Indoor
<b>Power Supply</b>	Offboard   Redundant Optional   Hot Swap
<b>Wall Mount</b>	Planar® EasyAlign™, Included
<b>Protection</b>	IP30
<b>Acoustic Noise</b>	Fanless Operation
<b>Operating Temperature/Humidity (degrees F/C) 10-80% relative humidity, non-condensing</b>	-10° to 40° C   14° to 104° F
<b>Storage Temperature/Humidity (degrees F/C) 10-85% relative humidity, non-condensing</b>	-20° to 60° C   -4° to 140° F
<b>Regulatory Compliance</b>	NRTL UL 60950-1, FCC Class A, CE EN60950-1, EN 55032 Class A and EN 55024, WEEE, CISPR 32/2015

<b>Video Inputs (Controller)</b>	4x HDMI 2.0 (w/ HDCP 2.2), 1x DisplayPort 1.2
<b>Video Outputs (Controller)</b>	9-Output Controller: 9x RJ45 8P8C, 1x DisplayPort 1.2   4-Output Controller: 4x RJ45 8P8C, 1x DisplayPort 1.2
<b>Video Extension built-in</b>	200 ft/60m over STP CAT6
<b>Control</b>	IR Remote, RS232, Ethernet, Planar WallDirector Software
<b>Touch Technology</b>	Planar LED MultiTouch (Optional)
<b>Fiber Video Extension Module Option</b>	1 RU rack mount module drives up to 4 outputs
<b>Fiber Video Extension Module Outputs</b>	SFP multi-mode transceivers supports distances up to 300m from wall   Single-mode compatible up to 10k from the wall

For more information, please visit [www.planar.com](http://www.planar.com)

*Specifications are subject to change without notice.*

*Specification Report Date: 11/27/2021*

*© Copyright 2021 Planar Systems, Inc. All rights reserved*