




Planar UC Complete 21:9 207" P1.2 LED Video Wall

The Planar® UC Complete™ 21:9 207" P1.2 LED video wall virtually brings remote meeting participants into large-sized hybrid unified communication rooms. The 207-inch display features a wide, 21:9 aspect ratio, 1.2mm pixel pitch and 3840 x 1620 resolution to beautifully display the most popular video collaboration platforms such as Microsoft Teams® with front row layout.

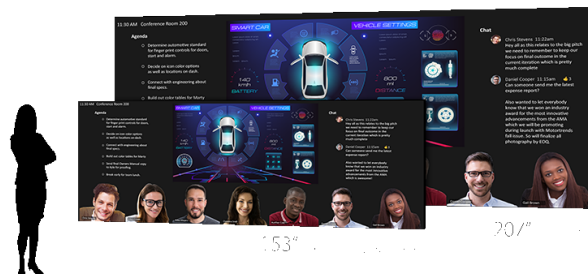

| SPECIFICATION | DETAIL |
|---------------------------------------|--------------------------------|
| Model | UC Complete 21:9 207in P1.2 |
| Video Controller Model | VC4-L-F |
| Display Technology | Direct View LED |
| Resolution | 3840 x 1620 |
| Display Size Diagonal | 207" |
| Display Size (W x H x D) | 15.87 W x 6.72 H x 0.35 D (ft) |
| Pixel Pitch | 1.2mm |
| Brightness Max (cd / sq m) | 600 nits |
| Contrast Ratio | 7000:1 |
| Brightness Uniformity | 97% |
| Color Uniformity | 97% |
| LED Refresh Rate | 3000 |
| Color Temperature Range (k) | 3,000-10,000 |
| Viewing Angle, Horizontal | 160° |
| Viewing Angle, Vertical | 140° |
| Video Input Resolution Maximum | 3840 x 2160 @ 60hz |
| Frame Rate | 50, 60 hz |
| Video Inputs | 4x HDMI 2.0 (HDCP 2.2) |
| Control | RS232, Network |
| Service Access | Front |

| | |
|--|--|
| Runtime Duty Cycle (Hours/Day) | 24 x 7 |
| LED Lifetime, Typical | 100,000hrs |
| Power Supply | Single Power |
| Line Voltage | 100-240V AC, 50/60hz |
| Power Consumption, Maximum (watts) | 6410 |
| Display Weight | 356.61kg 786.2lbs |
| Environmental | Indoor |
| Storage Temperature/Humidity (degrees F/C, relative humidity) | -20° to 60° C -4° to 140° F 10-85% relative humidity, non-condensing |
| Operating Temperature/Humidity (degrees F/C, relative humidity) | -10° to 40° C 14° to 104° F 10-80% relative humidity, non-condensing |

For more information, please visit www.planar.com

Specifications are subject to change without notice.

Specification Report Date: 6/26/2022

© Copyright 2022 Planar Systems, Inc. All rights reserved