


The Planar® LookThru® OLED Display (LO552) is a 55-inch transparent display that showcases dynamic information on a transparent surface glass without the need for a back light or enclosure. The electronics box on the Planar LookThru LO552 is set at a 90-degree angle to the display glass. The display can be used in both portrait and landscape modes, can be table-mounted, ceiling-mounted or tiled to create large, eye-catching video wall arrays. The Planar LookThru LO552 features Planar® ERO-OLED™ (Extended Ruggedness and Optics™) technology featuring Corning® Gorilla® Glass for enhanced durability and optics.

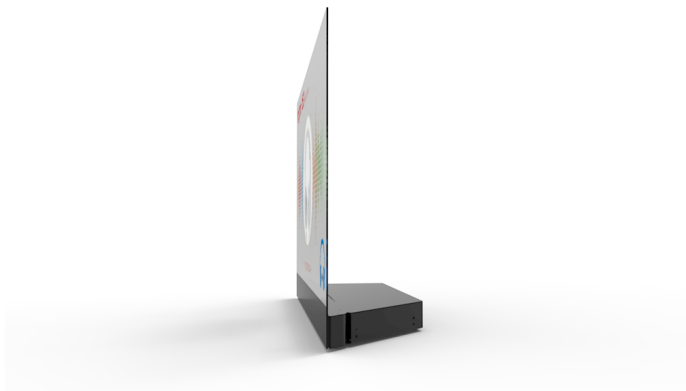

SPECIFICATION	DETAIL
<b>Product Name</b>	LO552
<b>Planar Part Number</b>	998-1483-00
<b>Viewable Size</b>	55" diagonal
<b>Display Active Area</b>	47.6" (W) x 26.8" (H) (1209.6 mm x 680.4mm)
<b>Display Inactive Area (Left/Right/Top/Bottom)</b>	0.2" / 0.2" / 0.2" / 4.0" (5.9 mm / 5.9 mm / 5.9 mm / 100.0 mm)
<b>Aspect Ratio</b>	16:9
<b>Display Resolution</b>	1920 x 1080, full HD
<b>Display Type</b>	Active Matrix Organic Light-Emitting Diode (AMOLED)
<b>Surface Treatment</b>	ERO (Extended Ruggedness and Optics) using Corning® Gorilla Glass®
<b>Full Screen White Brightness</b>	150 cd/m <sup>2</sup> (typ.)
<b>Peak White Brightness</b>	400 cd/m <sup>2</sup> (typ.)
<b>Brightness, Uniformity</b>	20%
<b>Transmissivity</b>	38%
<b>Orientation</b>	Landscape, Portrait, Inverted (Ceiling Mount), Tabletop, Tiled
<b>Viewing Angle (typ)</b>	178° H,V
<b>Contrast Ratio (typ)</b>	>100k:1
<b>Response Time (typ)</b>	<1 ms
<b>Palette</b>	1.073 billion colors (10-bit)
<b>Color Gamut</b>	120% of NTSC

<b>Pixels per inch (PPI)</b>	40
<b>Pixel Pitch</b>	0.63 mm
<b>Frame Rate</b>	120Hz
<b>Video Inputs</b>	HDMI x4, DisplayPort x1
<b>External Connections</b>	LAN RJ45, RS232, IR, Keypad, AC Power In
<b>Dimensions (W x H x D)</b>	48.1" x 31.4" x 11.7" (1221.4 mm x 798.5 mm x 298.0 mm)
<b>Weight</b>	73.5 lbs (33.4 kg)
<b>Power Requirements</b>	100 to 240VAC
<b>Power Consumption (typ)</b>	140W (<1W standby)
<b>Power Consumption (max)</b>	TBDW
<b>Product Approvals</b>	NRTL Listed, FCC-Class A, CE Class A, WEEE, RCM, PSE, EN60950 and CISPER22/2010, RoHS
<b>Mount</b>	No
<b>Control and Monitoring</b>	IR, RS-232, LAN, Keypad
<b>Operating Temperature</b>	0° to 40°C
<b>Storage and Transport Temperature</b>	-20° to 65°C
<b>Storage Temperature/Humidity (degrees F/C, relative humidity)</b>	95%
<b>Lifetime: Typical</b>	TBDk hours (dynamic image at 25°C)
<b>Options / Features</b>	Fanless, TAA-Compliant, optional tray. Tiling/Video Wall configurations possible through optional external processor. Standard mount.
<b>Warranty</b>	1 year
<b>UPC</b>	8 10689 00708 1

For more information, please visit [www.planar.com](http://www.planar.com)

*Specifications are subject to change without notice.*

*Specification Report Date: 5/26/2019*

*© Copyright 2019 Planar Systems, Inc. All rights reserved*